

11-03-00

PTO/SB/05 (08-00)

11/01/00

Please type a plus sign (+) inside this box



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

# UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 003239.P085  
First Inventor Kent Erickson  
Title CONNECTION PROTECTION BETWEEN CLIENTS AND OPTICAL  
Express Mail Label No. EL466330595US

(Only for new nonprovisional applications under 37 CFR 1.53(b))

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☐ Applicant claims small entity status.  
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 67]  
(preferred arrangement set forth below)  
- Descriptive title of the invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to sequence listing, a table,  
or a computer program listing appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 17]
5. ☐ Oath or Declaration [Total Pages 4]  
a. ☐ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 17 completed)  
i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(c)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or  
Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Form (CRF)  
b. Specification Sequence Listing on:  
i. ☐ CD-ROM or CD-R (2 copies); or  
ii. ☐ paper  
c. ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney  
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:

Prior application Information: Examiner Group/Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number of Bar Code Label



PATENT TRADEMARK OFFICE

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name					
Address					
City	State	Zip Code			
Country	Telephone	Fax			

Name (Print/Type)	William E. Atford	Registration No. (Attorney/Agent)	37,764
Signature		Date	11/01/00

Burden Hour Statement: This form is distributed to you 2 hours to complete. Time is only spent upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

U.S. PTO  
85702760  
11/01/00

# FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT (\$) 1,590.00

## Complete if Known

Application Number  
 Filing Date November 1, 2000  
 First Named Inventor Kent Erickson  
 Examiner Name  
 Group/Art Unit  
 Attorney Docket No. 003239.P085

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 02-2666  
 Deposit Account Name Blakely, Sokoloff, Taylor & Zafman LLP

- ☒ Charge Any Additional Fee(s) Requested Under 37 CFR §§ 1.16, 1.17, 1.18 and 1.20  
☐ Applicant claims small entity status See 37 CFR 1.27

2. ☒ Payment Enclosed:

☒ Check ☐ Credit card ☐ Money Order ☐ Other

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity Fee Code	Fee (\$)	Small Entity Fee Code	Fee (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	710.00
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$) 710.00

### 2. EXTRA CLAIM FEES

Total Claims Independent	Extra Claims	Fee from below	
60	20	40	18.00
5	2	2	80.00
			\$720.00
			\$160.00

Multiple Dependent

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code	Fee (\$)	Small Entity Fee Code	Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	260	204	135	Multiple Dependent claim, if not paid
109	80	209	40	**Reissue independent claims over original patent
110	18	210	9	**Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 880.00

## FEE CALCULATION (continued)

### 3. ADDITIONAL FEE

Large Entity Fee Code	Fee (\$)	Small Entity Fee Code	Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	*Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	*Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for response within first month	
116	390	216	195	Extension for response within second month	
117	890	217	445	Extension for response within third month	
118	1,390	218	695	Extension for response within fourth month	
128	1,890	228	945	Extension for response within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	126	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify)

Other fee (specify)

\*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$) 1,590.00

## SUBMITTED BY

Name (Print/Type) William E. Alford

Signature

Registration No. 37,764

## Complete (if applicable)

Telephone (714) 557-3800

Date 11/01/00

**WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2039.**

No. 003239.P085

Express Mail No. EL466330595US

UNITED STATES PATENT APPLICATION  
FOR

CONNECTION PROTECTION BETWEEN CLIENTS  
AND  
OPTICAL CROSS-CONNECT SWITCHES

Inventors:

**Kent Erickson**  
**Subhashini Kaligotla**  
**Rajiv Ramaswami**

Prepared by:

Blakely, Sokoloff, Taylor & Zafman LLP  
12400 Wilshire Boulevard, Suite 700  
Los Angeles, California 90025  
(714) 557-3800

**CONNECTION PROTECTION BETWEEN CLIENTS  
AND  
OPTICAL CROSS-CONNECT SWITCHES**

CROSS REFERENCE TO RELATED APPLICATIONS

- 5           This non-provisional U.S. Patent Application claims the benefit of U.S. Provisional Patent Application No. 60/162,936 entitled "OPTICAL CROSSCONNECT WITH OPTICAL TO ELECTRICAL CONVERTERS" filed on November 2, 1999 by inventor Rajiv Ramaswami; and also claims the benefit of
- 10 U.S. Provisional Patent Application No. 60/170,094 entitled "OPTICAL CROSSCONNECT WITH BRIDGING, TEST ACCESS AND REDUNDANCY" filed on December 10, 1999 by inventors Rajiv Ramaswami and Robert R. Ward; and also claims the benefit of U.S. Provisional Patent Application No.
- 15 60/170,095 entitled "OPTICAL CROSSCONNECT WITH LOW-LOSS BRIDGING, TEST ACCESS AND REDUNDANCY" filed on December 10, 1999 by inventors Steven Clark and Rajiv Ramaswami; and also claims the benefit of U.S. Provisional Patent Application No. 60/170,093 entitled "1+1 OPTICAL
- 20 PROTECTION USING OPTICAL CROSSCONNECT" filed on December 10, 1999 by inventors Rajiv Ramaswami and Robert R. Ward; and also claims the benefit of U.S. Provisional Patent Application No. 60/170,092 entitled "SIGNALING INTERFACE BETWEEN OPTICAL CROSSCONNECT AND ATTACHED EQUIPMENT" filed
- 25 on December 10, 1999 by inventor Rajiv Ramaswami; and also claims the benefit of U.S. Provisional Patent Application No. 60/186,108 entitled "1:N PROTECTION BETWEEN CLIENTS AND ALL-OPTICAL CROSSCONNECTS" filed on March 1, 2000 by inventors Kent Erickson, Subhashini Kaligotla, and Rajiv
- 30 Ramaswami; and also claims the benefit of U.S. Provisional Patent Application No. 60/200,425 entitled "OPTICAL CROSSCONNECT SYSTEM" filed on April 28, 2000 by inventors Rajiv Ramaswami, Steve Tabaska, and Robert Ward.

## BACKGROUND OF THE INVENTION

Over the last few years, the demand for high-speed communication networks has increased dramatically. In many situations, communication networks are implemented with electrical interconnections. As desired levels of bandwidth and transmission speed for communication networks increase, it will become more and more difficult for electrical interconnections to satisfy these levels.

One difficulty associated with electrical interconnections is that they are sensitive to external electromagnetic interference. More specifically, electromagnetic fields that reside in the vicinity of the interconnection lines induce additional currents, which may cause erroneous signaling. This requires proper shielding, which hampered general heat removal.

Another difficulty is that electrical interconnections are subject to excessive inductive coupling, which is referred to as "crosstalk". To alleviate crosstalk, the electrical interconnections must abide by fundamental rules of circuit routing so that they are set at a distance large enough to prevent neighboring signals from having any adverse effect on each other, which would reduce network performance.

In lieu of electrical, optical interconnections offer a solution to the difficulties affecting conventional electrical interconnections. For example, optical interconnections are not as susceptible to inductive or even capacitive coupling effects as electrical interconnections. In addition, optical interconnections offer increased bandwidth and substantial avoidance of electromagnetic interference. This potential advantage of optics becomes more important as the transmission rates increase and as the strength of mutual coupling associated

with electrical interconnections is proportional to the frequency of the signals propagating over these interconnections.

Albeit local or global in nature, many communications  
5 network features electronic switching devices to arbitrate the flow of information over the optical interconnections. Conventional electronic switching devices for optical signals are designed to include a hybrid optical-electrical semiconductor circuit employing photo  
10 detectors, electrical switches, optical modulator or lasers. The incoming optical signals are converted to electrical signals, which are amplified and switched for driving the lasers. One disadvantage associated with a conventional electronic switching device is that it  
15 provides less than optimal effectiveness in supporting high data transmission rates and bandwidth.

An alternative approach is to develop all optical, scalable cross-connect system, which performs switching operations of light pulses or photons without converting  
20 and reconverting signals between the optical domain to the electrical domain. As described below, the subject invention provides an optical, scalable cross-connect system with a variety of features such as redundancy for fault protection and non-intrusive, dedicated test access  
25 ports for example.

An important problem faced by network operators is how to reliably connect (i.e. link) various types of network equipment with all-optical equipment such as an all-optical cross connect switch. It is desirable to  
30 provide adequate protection so that in the event of a connection failure, service is not lost or substantially interrupted. Protection mechanisms can be employed within the all-optical equipment to increase their inherent

reliability. Other protection mechanisms can be employed to increase the reliability of the overall communication system. However, just as important is the optical connections between the network equipment and the all-optical equipment. It is desirable to provide a protection mechanism for the optical connections between the network equipment and the all-optical equipment that differs from the system and the equipment protection mechanisms.

10       A connection failure can occur in a single link between the connection of the various network equipment and the all-optical network equipment. This may be the case for example if a fiber optic cable is cut or damaged or if a fiber optic cable is unplugged from a port of  
15 either the various network equipment and the all-optical equipment. Alternatively, a connection failure can occur in the various network equipment or the all-optical network equipment itself due to a failure in a port of either. This may be the case for example if a component  
20 in a port card fails and does not allow a signal to propagate through the all-optical equipment. An exemplary component that might fail in the port card of the various network equipment would be an electrical-to-optical converter or transmitter.

25                   SUMMARY OF THE INVENTION

The present invention is summarized by the claims that follow below.

Briefly, the present invention provides methods, apparatus and systems for protecting connections between  
30 optical cross-connect switches and client equipment. A connection failure is detected, signaled, and a switch made to a protection connection between the client equipment and optical cross-connect switch so as to

minimize service interruption. An out-of-band channel or an in-band channel can be used to signal the connection failure.

The optical cross-connect switch couples to a network  
5 and one or more pieces of client equipment in order to bi-directionally transport optical signals with the network and the client equipment. The optical cross-connect switch includes an optical switch fabric, one or more I/O ports provided by I/O port cards to couple to the client  
10 equipment, at least one I/O port provided by an I/O port card to couple to the network, a protection port provided by an extra I/O port card to couple to the client equipment using a pair of protection links, and a signaling channel to transmit and receive a connection  
15 failure signal with the client equipment. The optical switch fabric has optical switches to connect or route optical signals between the network equipment and the client equipment. The one or more I/O ports each couple to the client equipment using a pair of working links. If  
20 one port of the one or more working ports has a connection failure, the first optical switch fabric switches the failed connection with the client equipment from the failed working port to the protection port.

Other aspects and features of the present invention  
25 will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying claims and figures.

## BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will become apparent from the following detailed description of the present invention in which:

5        Figure 1 is a simplified overview of an embodiment of an optical cross-connect switching system.

Figure 2 is a first exemplary embodiment of an optical cross-connect switching system of Figure 1.

10       Figure 3 is an exemplary embodiment of the optical fiber switch matrices forming an optical fiber switch fabric of Figure 2.

Figure 4 is an exemplary embodiment of mirror arrays forming an optical fiber switch matrix of Figure 3.

15       Figure 5 is an exemplary embodiment of an I/O subsystem featuring a plurality of I/O port modules.

Figure 6 is an exemplary embodiment of a data path for the transfer of light between I/O port modules and multiple fiber optical switch fabrics of Figure 2.

20       Figure 7 is an exemplary embodiment of a control path featuring the interconnections between the I/O port module and servo modules.

Figure 8 is an exemplary embodiment of the I/O port module of Figures 6 and 7 illustrating a data propagation circuit and a control circuit.

25       Figure 9 is an exemplary embodiment of multiple ports of I/O modules in communication with optical switches controlled by servo modules.

Figure 10 is an exemplary embodiment of an I/O port configured as a test access port.

Figure 11 is an exemplary embodiment of a servo module of the optical cross-connect system of Figure 1.

Figure 12 is an exemplary block diagram of a redundant architecture of the optical cross-connect  
5 switching system of Figure 1.

Figure 13 is a block diagram illustrating an out-of-band signaling interface between an optical cross-connect switch and attached network equipment.

Figure 14 is a block diagram illustrating a  
10 decentralized signaling interface between an optical cross-connect switch and attached network equipment.

Figure 15 is a block diagram illustrating an unused protection connection and a first signaling means between an optical cross-connect switch and a client.

Figure 16A is a block diagram illustrating a  
15 connection failure in a unidirectional link from a client into an optical cross-connect switch with the optical cross-connect signaling to the client to switch to protection.

Figure 16B is a block diagram illustrating the  
20 operation of the protection connection between the optical cross-connect switch and the client for the connection failure illustrated in Figure 16A in order to restore service.

Figure 17A is a block diagram illustrating a  
25 connection failure a unidirectional link from an optical cross-connect switch to a client with the client signaling to the optical cross-connect to switch to protection.

Figure 17B is a block diagram illustrating the  
30 operation of the protection connection between the optical cross-connect switch and the client for the connection

failure illustrated in Figure 17A in order to restore service.

Like reference numbers and designations in the drawings indicate like elements providing similar  
5 functionality. A letter or prime after a reference number designator represents another or different instance of an element having the reference number designator.

## DETAILED DESCRIPTION OF THE INVENTION

Herein, the exemplary embodiments of the present invention relate to a scalable, optical cross-connect switching system. These embodiments are not exclusive; rather, they merely provide a thorough understanding of the present invention. Well-known circuits are not set forth in detail in order to avoid unnecessarily obscuring the present invention.

In the following description, certain terminology is used to describe various features of the present invention. For example, a "module" includes a substrate normally formed with any type of material or materials upon which components can be attached such as a printed circuit board or a daughter card for example. Examples of a "component" include an optical switch, a processing unit (e.g., Field Programmable Gate Array "FPGA", digital signal processor, general microprocessor, application specific integrated circuit "ASIC", etc.), couplers and the like. A "coupler" is a component that performs a bridging operation on an input light signal by splitting that light signal into two or more output light signals. Each module features one or more interfaces to transport information over a link. A "link" is broadly defined as one or more information-carrying mediums that establish a communication pathway such as, for example, optical fiber, electrical wire, cable, bus traces, wireless channels and the like. "Information" is data, address, and/or control in any representative signaling format such as light signals (e.g., light pulses or photons).

The present invention provides methods, apparatus and systems to provide protection against failures between the

interconnection of client network equipment and optical cross-connect switching systems.

### I. General Architectural Overview

5 Referring to Figure 1, an exemplary embodiment of a simplified overview of an optical cross-connect switching system 100 is shown. Herein, the optical cross-connect switching system 100 comprises three basic units: a switch subsystem 110, a switch control subsystem 120 and  
10 an input/output (I/O) subsystem 130. In one embodiment, the modular architecture of the switch subsystem 110, by a method of having replaceable optical switch cores, provides for switch subsystem maintenance in the event of failure within the switch subsystem 110. It is  
15 conceivable that further modularity could be achieved by having replaceable subsections within, thus providing for switch matrix maintenance in the event of failure within a switch matrix itself. The modular architecture of both the switch control subsystem 120 and the I/O subsystem 130,  
20 each handling a small number of I/O ports in the system 100, provides scalability to the optical cross-connect switching system 100. Thus, additional I/O ports may be subsequently added to the optical cross-connect switching system 100 by adding or removing input/output (I/O) port  
25 modules (described below).

The switch subsystem 110 includes optical switches for routing light signals. In one embodiment, the optical switches forming the switch subsystem 110 are micro-machined mirrors; however, it is contemplated that other  
30 switch fabrics may be used such as liquid crystal technology. The I/O subsystem 130 receives external light signals 140 and transfers these signals to the switch subsystem 110. The switch control subsystem 120 controls the configuration of the switch subsystem 110 (e.g.,

mirror orientation) and performs certain monitoring functions. The interconnectivity between the switch subsystem 110, the switch control subsystem 120 and the I/O subsystem 130 includes redundancy so that no equipment  
5 failures would cause complete disablement of the system 100.

Referring now to Figure 2, a first exemplary embodiment of an optical cross-connect switching system 100 is shown. In general, the optical cross-connect  
10 switching system 100 is a matrix-based optical cross-connect with associated I/O port modules. More specifically, the optical cross-connect switching system 100 is collectively formed by a plurality of platforms 205, 206 and 207 in communication with each other,  
15 although the implementation of the switching system 100 as a single platform is another embodiment. Herein, each platform 205, 206 and 207 includes a frame 210 (e.g., a rack) that physically supports I/O port modules forming the I/O subsystem 130 as well as servo modules, servo  
20 control modules and/or network control modules of the switch control subsystem 120. The modules are arranged either horizontally or vertically within each platform 205, 206 and 207 and can be individually removed or installed without interfering with immediately adjacent  
25 modules. In addition, the frame 210 may also physically support one or more optical switch cores, which may also generally be referred to as "switch fabric," of the switch subsystem 110.

As shown in this embodiment, the first platform 205  
30 comprises (i) a plurality of I/O port modules 215 associated with the I/O subsystem 130 of Figure 1, (ii) a plurality of servo modules 225 and a management control subsystem (MCS) 235 associated with switch control subsystem 120 of Figure 1, and (iii) a first (primary)

optical switch core 240 associated with switch subsystem 110 of Figure 1. Similarly, the second platform 206 comprises a plurality of additional I/O port modules 245, a plurality of (redundant) servo modules 250, a management  
5 control subsystem 255, and a second (redundant) optical switch core 260. The third platform 207 comprises a plurality of servo modules 265 that control various mirrors of the first and second optical switch cores 240 and 260, which correspond to additional ports associated  
10 with I/O port modules 245. Additionally, a light path test signal generator(s), a light path signal monitor(s), circuit breakers and/or alarm visual indication 270 may be located within the third platform 207. For clarity, the elements forming the first platform 205 are described  
15 since these elements may be found in the second and/or third platforms 206 and 207.

As shown in both Figures 2-4, the first optical switch core 240 includes a first optical switch matrix 241 and a second optical switch matrix 242. These matrices  
20 241 and 242 are collectively positioned to route light signals 250 between a port of a source I/O port module 215<sub>s</sub> ("s" is a positive whole number) and a port of a destination I/O port module 215<sub>d</sub> ("d" is a positive whole number), both modules located in any of the platforms 205,  
25 206 and 207 as shown in detail in Figure 3. Although a two-bounce routing technique is shown, it is contemplated that other light routing techniques may be used including a three-bounce routing technique in which an a second bounce mirror 202 optionally shown in Figure 3 is  
30 positioned to assist in routing light signals from one optical switch matrix to another.

As shown in Figure 4, one embodiment for each of the optical switch matrices 241 and 242 includes multiple arrays 300 of micro-machined mirrors. Each mirror (e.g.,

mirror 310) features a mirrored surface 311 and torsional flexures 320 and 330 that enable the mirror 310 to adjust its physical orientation to reflect incoming light signals in any selected direction. Herein, both the first and

5 second optical switch matrices 241 and 242 include Q micro-machined mirrors, where "Q" is less than or equal to the maximum number of I/O ports that can be supported by the optical cross-connect switching system 100. For this embodiment, "Q" is greater than or equal to 64 but less

10 than or equal to 1152 ( $64 \leq Q \leq 1152$ ). However, the present invention is not limited to any maximum number of mirrors or I/O ports. It is contemplated, however, that the number of mirrors employed within the first and second optical switch matrices 241 and 242 may differ.

15 As generally shown in Figures 2, 5 and 6, the plurality of I/O port modules 215 features two groups 216 and 217 of I/O port modules. Each group, such as group 216 or 217 for instance, includes up to seventy-two (72) quad-port I/O port modules as shown in Figure 5 that

20 receive power from one or more power supply modules denoted herein as "PSM". The components forming an I/O port module is described below and shown in Figures 8 and 9. Thus, each I/O port module, such as I/O port module 215, for example, features an external interface 400 for a

25 plurality of I/O ports 410 (e.g., four I/O ports). An I/O port 410 features a duplex socket that is adapted to receive a duplex pair of optical fiber links, one optical fiber link routes a light signal to the I/O port 410 while the other routes light signals from the I/O port 410.

30 This support bi-directional optical connections. There is a small percentage (e.g., less than 15%) of these I/O ports, however, that may be assigned as test access ports as described below.

Moreover, as shown in Figure 6, upon receiving an incoming light signal over an optical fiber link 420, the I/O port module 215, performs a bridging operation by splitting the incoming light signal into multiple (two or  
5 more) bridged light signals for routing to the first and second optical switch cores 240 and 260. The bridged light signals are routed through an internal optical interface 425 featuring optical fiber ribbon links 430 and 440. For this embodiment, the "optical fiber ribbon  
10 links" are ribbon cables having multiple optical fiber lines (e.g., two lines from each I/O port). The first optical switch core 240 provides a primary optical path. The second optical switch core 260 provides a redundant optical path in the event the first optical switch core  
15 240 is not operating properly. The optical switch cores 240 and 260 route the bridged light signals to a selected port of a destination I/O port module (e.g., I/O port module 215<sub>d</sub>) via optical fiber ribbon links 450 and 460.

Upon receiving light signals from both the first and  
20 second optical switch cores 240 and 260, the I/O port module 215, provides small percentage optical tap signals of the received light paths to the respective servo modules, which in turn determine light signal quality. The respective servo modules will convey light signal  
25 quality for each respective light path to the I/O port module, using a digital protocol over an electrical communication link 505 to the I/O port module as shown in Figure 7. The I/O port module 215, will in turn, determine (i.e. select) which light signal has the higher signal  
30 quality and outputs that signal via interface 400. In most cases, the signal quality of the two light paths presented to the I/O port module will be of the same signal quality and may have a relatively low optical loss of approximately seven decibels (7 dB) or less.

Referring now to Figures 2 and 7, each servo module 225 is configured to receive optical tap signals from one or more I/O port modules. Herein, servo module 225<sub>i</sub> is configured to receive optical tap signals via link 500  
5 from I/O port module 215<sub>s</sub>. These optical tap signals provide feedback to indicate a percentage of the bridged light signals and also allow for light to be injected under certain conditions. In response to receiving optical tap signals via link 500, the servo module 225<sub>i</sub>  
10 provides mirror control signals over link 510 to the first optical switch core 240. The mirror control signals are routed via a unique communication path to an optical switch (e.g., a micro-machined mirror) and are associated with the port of the I/O port module 215<sub>s</sub> through which the  
15 incoming light signal was routed. The mirror control signals are used for proper adjustment of the physical orientation of the mirror.

The I/O port module 215<sub>d</sub> provides optical tap signals over link 530 to servo module 225<sub>j</sub>. In response to  
20 receiving the optical tap signals from I/O port module 215<sub>d</sub>, the servo module 225<sub>j</sub> provides mirror control signals via link 540 to the first optical switch core 240. The mirror control signals are routed via a unique communication path to a micro-machined mirror associated  
25 with a selected port of the I/O port module 215<sub>d</sub> from which the light signal would be output. Herein, sensing the optical tap (feedback) signals, the servo module 225<sub>j</sub> determines the light signal quality and conveys light signal quality information for each light path using a  
30 digital protocol over (electrical) link 535. Thereafter, the I/O port module 215<sub>d</sub> chooses the selected port (i.e. port having the best light signal quality).

Collectively, the optical tap signals, mirror control signals and light signal quality information, which are

routed over links 500, 510, 530, 540, 505 and 535, are used by servo modules 225<sub>i</sub> and 225<sub>j</sub> for adjustment of the physical orientation of mirrors to make a connection between I/O port module 215<sub>s</sub> and 215<sub>d</sub>.

- 5        Additionally, I/O port modules 215<sub>s</sub> and 215<sub>d</sub> also transfer optical tap signals via links 520 and 550, respectively. Similar to the above description, these optical tap signals establish the redundant optical path by altering the physical orientation of one or more micro-
- 10    machined mirrors of the second optical switch core 260 using mirror control signals over links 560 and 570 and light signal quality information via links 525 and 555.

- In the event that no optical power is presented to the I/O port module 215<sub>s</sub>, a substitute light signal may be
- 15    injected from the servo module 225<sub>i</sub> via link 500. An alignment laser may be used as shown in Figure 11 described below. This process of light substitution allows for connection establishment and verification when no input light is present to the I/O port module 215<sub>s</sub>. The
- 20    substitute light source can be within the same wavelength range (e.g. 1100 nanometers "nm" - 1700 nm) as the allowed input light signal range. In one embodiment, the light source or method of injection would be chosen to not
- interfere with attached equipment's select operational
- 25    wavelength range. Choosing a different wavelength source on the servo module and/or a wavelength specific splitter and/or filter on the I/O port module could do this particular embodiment.

- The management control subsystem 235 (see Figure 2)
- 30    enables communications between two or more servo modules placed within the same or different platforms. The management control subsystem 235 includes at least one servo control module 236 and an optional network control module 238. In one embodiment, the servo control module

(SCM) 236 ensures communication between at least servo modules 225<sub>1</sub> and 225<sub>3</sub> that control mirrors associated with the first optical switch core 240. The network control module (NCM) 238 manages the execution of connection configurations for the whole cross-connect switching system and ensures communications between multiple servo control modules 236 and 237. The same architecture is used to control optical switches within the second optical switch core 260 as shown.

10

## II. General Architecture of the I/O Port Modules

Referring now to Figures 8 and 9, an exemplary embodiment of an I/O port module (e.g., I/O port module 215<sub>s</sub>) and its communications over optical switch cores 240 and 260 is shown. I/O port module 215<sub>s</sub> includes a data propagation circuit 600 for each I/O port and a control circuit 670. Thus, in the event that the I/O port module 215<sub>s</sub> is configured with four I/O ports, four data propagation circuits are implemented on the I/O port module 215<sub>s</sub> as represented. Only the data propagation circuit 600 for one of the I/O ports of I/O port module 215<sub>s</sub> (e.g., i<sup>th</sup> I/O port) is shown in detail for clarity sake.

In one embodiment, the data propagation circuit 600 comprises an optical switch 610, a (passive) splitter 620 and a plurality of tap couplers 630<sub>1</sub>-630<sub>4</sub>. The plurality of tap couplers 630<sub>1</sub>-630<sub>4</sub> correspond to the pairs of optical fibers found in optical fiber ribbon links 430 and 440. The control circuit 670 comprises a programmable memory 680, a processing unit 685 and status identification components 690.

As shown, each port of the I/O port module 215<sub>s</sub> supports full-duplex communications. Thus, an incoming light signal 606 received over port 605 is routed to the

splitter 620. The splitter 620 effectively performs a bridging operation by splitting the incoming light signal 606 into bridged light signals 625, which collectively have the same power level (energy) as the light signal 606. In one embodiment, when the splitter 620 is a 50/50 splitter, the bridged light signals 625 have equal power levels. However, it is contemplated that splitter 620 may produce bridged light signals 625 having disproportionate power levels.

10 The bridged light signals 625 are routed through the tap couplers  $630_1$  and  $630_2$ . Attached to servo module  $225_1$  and servo module  $225_{i+1}$  via optical tap links 500 and 520, the tap couplers  $630_1$  and  $630_2$  are used to monitor the power level of light signals 635 and 636 propagating  
15 through optical fiber ribbon links 430 and 440 (referred to as "outgoing light signals"). This enables the servo modules  $225_1$  and  $225_{i+1}$  to verify the connectivity of the splitter 620 to optical fiber ribbon links 430 and 440 and to detect unacceptable variances in optical performance of  
20 the light signal. As shown for this embodiment, the tap couplers  $630_1$  and  $630_2$  may separate the bridged light signals into signals having disproportionate power levels in order to maximize the power levels of the outgoing light signals propagating through optical fiber ribbon  
25 links 430 and 440. For example, where the tap couplers  $630_1$  and  $630_2$  may operate as 90/10 splitters, the outgoing light signals 635 and 636 have ninety (90%) of the total power level of the bridged light signal while the tap optical signals 640 and 641 have only ten percent (10%).

30 Referring to Figure 8, tap couplers  $630_3$  and  $630_4$  are configured to receive incoming light signal 650 and 655 via optical fiber ribbon links 430 and 440, respectively. The tap couplers  $630_3$  and  $630_4$  effectively separate the light signals 650 and 655 into corresponding pairs of

light signals having disproportionate power levels (e.g., signals 661, 662 and 663, 664). Signals 662 and 664 having the lower power level are provided to the servo module 225<sub>i</sub> and servo module 225<sub>i+1</sub> via links 500 and 520  
5 for monitoring the power levels of the light signals 661 and 663, without the light signals 661 and 663 experiencing substantial signal degradation. The signals 662 and 664 may be light signals that undergo O/E conversion at the I/O port module 215<sub>s</sub> or at the servo  
10 modules 225<sub>i</sub> and 225<sub>i+1</sub> as shown in Figure 11. The tap couplers 630<sub>3</sub> and 630<sub>4</sub> are shown as 90/10 splitters; however, tap couplers 630<sub>3</sub> and 630<sub>4</sub> may be any selected ratio, including 50/50.

The light signals 661 and 663 are routed to the  
15 optical switch 610 of a destined I/O port. The control circuit 650 on the I/O port module 215<sub>s</sub> determines which of the pair of light signals 661 and 663 has the best signal quality based on conveyed light signal quality information from the servo modules via links 505 and 525 as briefly  
20 described below. Parameters used to determine light signal quality include measured optical signal intensity/power, extinction ratio, and the like. The light signal quality information to the I/O port module may be conveyed as failed due to the servo module service  
25 operations, high bit error rate, an external light path has failed, and the like. The light signal 661 or 663 with the best signal quality is output through the I/O port 605. Of course, it is contemplated that the light signal output operations described for I/O port i are applicable  
30 to I/O port j as shown.

It is contemplated that an I/O port of the I/O port module 215<sub>s</sub> may be configured as a test access port. A "test access port" is an I/O port that is used for monitoring light signals routed through another port.

Normally, the test access port receives a portion of the power level of a light signal routed through a selected optical switch (e.g., micro-machined mirror). For example, as shown in Figure 10, an I/O port 218 of the I/O port module 215<sub>s</sub> is configured for coupling with a monitoring device 219 (e.g., a bit error rate "BER" monitor in combination with an optical-electrical "O/E" converter, etc.) to monitor a power level of a light signal routed to the i<sup>th</sup> I/O port from an optical switch.

Referring back to Figure 8, the control circuit 670 comprises the programmable memory 680 in communication with the processing unit 685 (e.g., FPGA). The programmable memory 680 contains software and other information used by the processing unit 685 to provide selection of the best quality signal based on digital electrical signaling from servo module 225<sub>i</sub> and servo module 225<sub>i+1</sub> over links 505 and 525, respectively. Also, programmable memory 680 includes information used by the processing unit 685 to control the state of the status identification components 690 (e.g., light emitting diodes "LEDs"). The state of the status identification components 690 identifies (1) whether each I/O port is operational and/or (2) whether the I/O port module is operational. The processing unit 685 is further in communications with optical switches of each data propagation circuit employed in the I/O port module 215<sub>s</sub> in order to receive switch status signals and provide switch control signals. As shown for clarity, processing unit 685 provides optical switch 610 with switch control signals for receiving switch status signals and selecting either light signal 661 or light signal 663.

### III. General Architecture of the Servo Modules

Referring now to Figure 11, an exemplary embodiment of the servo module (e.g., servo module 225<sub>i</sub>) is shown. In one embodiment, the servo module 225<sub>i</sub> comprises two separate  
5 modules in communication over connectors 705 and 790. These separate modules are referred to as an "optical detector module" 700 and a "servo mirror control module" 750.

The optical detector module 700 comprises a first  
10 processing unit 710, memory 715, a plurality of detection/modulation (DM) circuits 716 and status identification components 717. As shown, the optical detector module 700 features sixteen (16) DM circuits 716 to support four (4) quad-port I/O port modules. Each DM  
15 circuit 716 includes an analog-to-digital (A/D) converter 720, a laser 725, optical-electrical (O/E) detectors 730 and 731, and optional amplifiers 735 and 736.

The servo mirror control module 750 comprises a second  
20 processing unit 755, a memory 760, a plurality of mirror signal detection and generation (SDG) circuits 761, a third processing unit 775 and status identification components 795. The SDG circuits 761 correspond in number to the DM circuits 716 of the optical detector module 700. Each SDG circuit 761 features an A/D converter 765, a digital-to-analog (D/A) converter 770, hinge position sensors 780-781  
25 and high voltage (HV) mirror drivers 785-786.

As shown in Figure 11, the optical detector module 700 is removably coupled to the servo mirror control module 750. This allows the optical detector module 700  
30 to be "hot swapped" from a backplane, which features connectors 705 and 790 connecting the optical detector module 700 to the servo mirror control module 750, without disrupting the servo mirror control module's 750 ability to hold the mirrors in their existing positions for an

extended period of time. This "hot swapping" of the optical detector module 700 allows for repair or upgrade of the optical detector module 700. Optical detector module 700 receives optical tap (feedback) signals 640 and 5 662 from one or more I/O port modules (e.g., I/O port module 215, via link 500) and can transmit optical control signals 726 from the laser 725 for alignment of light signals transferred between two I/O port modules. The optical tap signal 640 is based on an input light signal 10 that is routed to the switch fabric.

More specifically, with respect to servo module 225<sub>1</sub>, the O/E detectors 730 and 731 are coupled to tap couplers 630<sub>1</sub> and 630<sub>3</sub> of Figures 8-9. More specifically, the O/E detectors 730 and 731 are configured to detect incoming, 15 optical tap signals 640 and 662, convert the optical tap signals 640 and 662 into corresponding electrical control signals measuring a power level of the outgoing light signal, and optionally route the electrical control signals to corresponding amplifiers 735 and 736. The 20 (amplified) electrical control signals are provided to the A/D converter 720. The A/D converter 720 converts the electrical control signals into measured power sense signals 644 of a digital form. The measured power sense signals 644 are provided to the first processing unit 710.

25 Herein, the first processing unit 710 may perform a number of operations based on the electrical control signals such as threshold crossing, LOS integration, input/output power ratio analysis and the like. Software and other information necessary for performing these 30 operations may be obtained from the memory 715 by the first processing unit 710. Herein, memory 715 can be non-volatile memory such as non-volatile random access memory, electrically erasable programmable read only memory (EEPROM) and the like.

The optical detector module 700 includes multiple status identification components 717 (e.g., light emitting diodes "LEDs"). A first LED 718 identifies whether any operational faults associated with the servo module 225<sub>1</sub> have occurred. A second LED 719 indicates when the optical detector module 700 is in service.

Referring still to Figure 11, in this embodiment, the servo mirror control module 750 comprises the second processing unit 755 that is coupled to both the first processing unit 710 and the third processing unit 775. For instance, in order to adjust the switch fabric in response to the measured power sense signals 644, the second processing unit 755 receives information representative of the measured power sense signals from the first processing unit 710 via connectors 705 and 790. The second processing unit 755 further receives information representative of measured power sense signals for the light signal at a targeted I/O port. This information is provided by the SCM 236 over link 580 via the third processing unit 775. This assists in reducing errors in adjusting the torsional flexures of the mirrors.

Upon receipt of these measured power readings, the second processing unit 755 controls a particular SDG circuit corresponding to a mirror associated with the I/O port over which the tapped light signal was routed. The control involves slight mirror orientation adjustments if the power level readings differ substantially.

In particular, a first hinge position sensor 780 senses a position of a mirror via link 510 from the first optical switch core 240. The sensed position signal is routed to the A/D converter 765, which is subsequently placed in a digital format before routing to the second processing unit 755. When the servo module 225<sub>1</sub> is adjusting the switch fabric, the second processing unit

755 transfers mirror control signals to the D/A converter 770. The mirror control signals are routed to HV driver 785 and applied to a selected mirror of the first optical switch core in order to adjust the amount of torsional flexure along a first dimensional plane (e.g., X-axis). This is accomplished to minimize the loss experienced by the light signal.

A second hinge position sensor 781 senses a position of a mirror for the first optical switch core along a second dimensional plane (e.g., Y-axis). The sensed position signal is routed to the A/D converter 765, which is subsequently placed in a digital format before routing to the second processing unit 755. When the servo module 225<sub>1</sub> is adjusting the switch fabric, the second processing unit 755 transfers mirror control signals to the D/A converter 770. The mirror control signals are routed to HV driver 786 and are applied to the selected mirror of the first optical switch core in order to adjust the amount of torsional flexure along the second dimensional plane. The specifics of the hinge position sensors 780 and 781 are described in PCT application entitled "Micromachined Members Coupled for Relative Rotation By Torsional Flexure Hinges" (International Publication No. WO 00/13210) published on or around March 9, 2000.

In another embodiment, when I/O port module 215<sub>2</sub> is the destination of a light signal, the second processing unit 755 receives information representative of the measured power sense signals associated with the optical tap signal 662 that has been analyzed by the first processing unit 710. The optical tap signal 662 is based on an output light signal being routed from an I/O port. In this situation, the third processing unit 775 receives information associated with the measured power sense

signals from a source I/O port as reported by SCM 236 over link 580.

IV. Redundant Architecture of the Optical Cross-  
5 Connect Switching System

Referring now to Figure 12, a block diagram of an alternative embodiment of the architecture of the optical cross-connect switching system of Figure 1 is shown which includes redundant protection capabilities. Redundancy is  
10 desired in order to increase the reliability of such an optical cross-connect switching system. Aside from the I/O port modules, all other modules are duplicated to obtain the desired redundancy. Thus, it is necessary for light signals from a source I/O port module 215<sub>a</sub> to be  
15 routed to a destination I/O port module 215<sub>a</sub> through two optical paths, namely a primary optical path 800 using a first optical switch core 240 and a redundant optical path 810 using a second optical switch core 260.

With respect to the primary optical path 800, a servo  
20 module 225<sub>i</sub> is connected to both the source I/O port module 215<sub>a</sub> and the first optical switch matrix (not shown) of the first optical switch core 240. In particular, the servo module 225<sub>i</sub> controls the physical orientation of a mirror of the first optical switch matrix that corresponds to the  
25 source I/O port module 215<sub>a</sub>. To establish and maintain the primary optical path 800 for the light signal, the servo module 225<sub>i</sub> needs to communicate with other servo modules such as servo module 225<sub>j</sub>. Thus, a servo control module (SCM) is implemented to support such communications,  
30 possibly through a time-slot switching arrangement.

As shown, the SCMs 236<sub>1</sub>-236<sub>2</sub> are also duplicated so that each servo module 225 is connected to at least two SCMs 236<sub>1</sub>-236<sub>2</sub>. Thus, in the event that the SCM 236<sub>1</sub> fails, the primary optical path 800 remains intact because

communications between the servo modules 225<sub>1</sub> and 225<sub>2</sub> are maintained via redundant SCM 237<sub>1</sub>. The transfer is accomplished by temporarily halting the adjustment of (i.e. freezing) the mirrors inside the first optical switch core 240 while control is transferred from SCM 236<sub>1</sub> to SCM 237<sub>1</sub>. The SCMs 236<sub>1</sub> and 237<sub>1</sub> associated with the first optical switch core 240 are in communication via a network control modules (NCMs) 238<sub>1</sub> and 238<sub>2</sub> for example.

With respect to the redundant optical path 810, a servo module 225<sub>1,1</sub> is connected to both the source I/O port module 215<sub>a</sub> and one or more mirror(s) of a first optical switch matrix (not shown) of the second optical switch core 260. Another servo module 225<sub>2,1</sub> is connected to both the destination I/O port module 215<sub>d</sub> and one or more mirror(s) of a second optical switch matrix (not shown) of the second optical switch core 260. The orientation of these mirrors produces the redundant optical path 810.

To establish and maintain the redundant optical path 810 for the light signal, a SCM 236<sub>2</sub> may be implemented with a dedicated time-slot switching arrangement in order to support continuous communications between the servo module and another redundant servo module associated with the destination I/O port module. As shown, the SCM 236<sub>2</sub> is also duplicated so that each servo module 225<sub>1,1</sub> and 225<sub>2,1</sub> is connected to at least two SCMs 236<sub>2</sub> and 237<sub>2</sub>. Thus, the redundant optical path 810 is maintained even when one of the SCMs 236<sub>2</sub> and 237<sub>2</sub> fails. The SCMs 236<sub>2</sub> and 237<sub>2</sub> associated with the second optical switch core 260 communicate via the first NCM 238<sub>1</sub> and the second NCM 238<sub>2</sub>, respectively. The second NCM 238<sub>2</sub> is in communication with the first NCM 238<sub>1</sub> to allow all SCMs and servo modules to communicate for coordination of the primary optical path 800 and the redundant optical path 810.

### V. Signaling Interface

The present invention includes alternate embodiments for realizing a signaling interface between optical cross-connect switches and attached network equipment (ANE). Referring to Figure 13, optical cross-connect switches (OXC's) 1300 are deployed in a telecommunications network. An optical cross-connect switch can also be referred to herein as optical cross-connect switching system, OXC, or optical cross-connect. Attached to the optical cross-connect switches in a telecommunications network is one or more pieces of attached network equipment (ANE) 1302. The attached network equipment (ANE) 1302 includes telecommunication network devices such as a wavelength division multiplexed (WDM) line terminals, SONET add/drop multiplexers, internet protocol (IP) routers, additional optical cross-connect switches and Asynchronous Transfer Mode (ATM) switches which are also collectively referred to as client equipment. WDM line terminals provide interconnection between sites and are also terminating devices included in SONET add/drop multiplexers, internet protocol (IP) routers, or Asynchronous Transfer Mode (ATM) switches. The present invention establishes a signaling interface between the optical cross-connects 1300 and attached network equipment (ANE) 1302.

There are a number of reasons for establishing a signaling interface between the optical cross-connects 1300 and attached network equipment (ANE). One reason is to allow the other network equipment in the telecommunications network to provision connections through the OXC. It is very desirable to allow other equipment to set up a connection through the OXC in an automated manner, rather than manually provisioning such connections. Another reason is to provide real-time

performance monitoring and other management information to the optical cross-connects 1300 from the attached network equipment 1302. By providing a signaling interface where performance information is provided back to the optical

5 cross-connects 1300, expensive monitoring elements are not needed inside the optical cross-connects 1300 and costs are saved. The attached network equipment usually already have electronic components for monitoring signals, such as optical-to-electrical-to-optical converters (OEOs or

10 O/E/Os), in order to extract such information from optical signals. Thus, the electronics for monitoring do not need to be duplicated inside the optical cross-connects 1300 when they are already provided in the attached network equipment 1302. Instead the optical cross-connects 1300

15 can obtain the real-time performance monitoring and other management information from the other network equipment that is attached to the optical cross-connects 1300 through a signaling channel. Another reason to establish a signaling interface is so that the attached network

20 equipment 1302 can obtain monitoring and other management information real-time from the optical cross-connects 1300. The optical cross-connects 1300 can similarly monitor received optical signals on its input ports and provide information back to the attached network equipment

25 1302. Preferably, the optical cross-connects 1300 only monitor the optical power of the received optical signals by tapping off a small percentage of the energy of the optical signal and use optical-to-electrical converters (OEs or O/Es) to determine the optical power without using

30 O/E/Os.

Figure 13 illustrates a block diagram of an out-of-band signaling interface between an optical cross-connect switch 1300 and attached network equipment 1302. The signaling interface is realized by using an out-of-band

communication channel over a network 1304 which may also be referred to as an out-of-band signaling channel. In-band communication channels are those used by the optical cross-connect switch 1300 to switch data signals on the one or more data signals lines 1306A-1306N. An out-of-band communication channel is a communication channel other than that used by the optical cross-connect switch 1300 to switch its data signals on the data lines 1306A-1306N. The in-band communication channels used to switch data signals on the data lines 1306A-1306N by the optical cross-connect switch 1300 are light signals, also referred to as photonic signals or optical signals, that are carried in optical fibers. The data lines 1306A-1306N are not used for the signaling interface because these lines carry high-bandwidth signals. To convert optical signals in the optical domain into electrical signals in the electrical domain to extract signaling information is a very expensive process. Indeed, a major reason for using an all-optical cross-connect is to avoid converting signals from the optical domain to the electrical domain. The out-of-band signaling channel is provided on a network 1304 such as a LAN, a MAN, the internet or other WAN. Each of the data lines 1306A-1306N is bi-directional to provide duplex data communication channels. The data lines 1306A-1306N in one embodiment include at least two optical fibers for data flow in each direction between the optical cross-connect switch and the attached network equipment 1402 to provide full duplex data communication channels. In another embodiment, each of the data lines 1306A-1306N is a single optical fiber to provide bi-directional signal flow in both directions and can be full or half duplex data communication over a single optical fiber. Full duplex is accomplished over a single optical fiber by transmitting and detecting signals in the single

optical fiber at each end. The network 1304 also provides a bi-directional out-of-band signaling channel so that signals can be received and transmitted in each direction between the optical cross-connect switch and the attached  
5 network equipment 1402 and other network equipment coupled to the network 1304. The out-of-band signaling channel can be either full duplex or half duplex in providing bi-directional data communication.

Data signals from the optical cross-connect switch  
10 1300 on the data lines 1306A-1306N are coupled into the attached network equipment 1302. The data lines 1306A-1306N are a light transmission media, such as optical fibers, coupled between the optical cross-connect switch 1300 and the attached network equipment 1302 to carry or  
15 transport the light pulses or photon pulses of the data signals there-between. That is, the attached network equipment 1302 is coupled or attached to the optical cross-connect switch 1300 to accept data signals transported over the one or more data lines 1306A-1306N.  
20 Data signals from the attached network equipment (ANE) 1302 on the data lines 1306A-1306N are coupled into the optical cross-connect switch 1300. The optical cross-connect switch 1300 is coupled or attached to the attached network equipment 1302 to accept data signals transported  
25 over the one or more data lines 1306A-1306N.

The optical cross-connect switch 1300 includes the network management controller (NMC) 1310 (also previously referred to herein as a network control module (NCM)), one or more I/O port cards 1314A-1314N and 1315A-1315N, and  
30 the optical switch fabric 1312. The optical switch fabric generates optical paths therein in order to cross-connect (also referred to as route or switch) optical signals from an I/O port card on the input side to an I/O port card on the output side. The optical paths are bi-directional in

that the optical signal can flow in either direction with the optical path coupled to either an input port or an output port of a port card. I/O port cards can also be referred to as line cards, port cards, or I/O port modules

5 as previously used herein. Each of the one or more I/O port cards 1314A-1314N and 1315A-1315N of the optical cross-connect switch 1300 includes an optical input port and an optical output port to couple to the optical fibers of the full duplex data lines 1306A-1306N. Port cards

10 1314 can also include some simple monitoring functions by tapping off a small percentage of the energy of the optical signal and converting it into an electrical signal using an inexpensive O/E. However, port cards 1314 do not need a full-fledged receiver for extensive monitoring of

15 parameters such as a bit error rate or the presence of a particular frame because the signaling interface of the present invention is provided in order to acquire such information from other network equipment.

The attached network equipment 1302 includes a

20 network management controller 1320 and one or more I/O port cards 1321A-1321N (also referred to as line cards or herein previously as I/O port modules). Each of the one or more I/O port cards 1321A-1321N includes an optical-electrical-optical converter 1322A-1322N on its data input

25 ports to couple to optical fibers of the data lines 1306A-1306N. The one or more optical-electrical-optical converters 1322A-1322N first convert the optical signals on the data lines 1306A-1306N into electrical signals and then convert the electrical signals into optical signals.

30 The one or more optical-electrical-optical converters 1322A-1322N can be used for a number of reasons including to generate electrical signals to monitor the optical signal as well as to amplify (i.e. regenerate) low level incoming optical signals. In the conversion process, the

one or more optical-electrical-optical converters 1322A-1322N provide information regarding the optical signals in electrical form which is tapped for monitoring purposes as the electrical signals 1323A-1323N. The electrical  
5 signals 1323A-1323N may include information from other sources of the respective port card 1315A-1315N that may be of relevance to the optical cross-connect switch. The one or more optical-electrical-optical converters 1322A-1322N and their electrical signals were originally used in  
10 the attached network equipment 1302 to facilitate its functionality and monitor its performance and not provide feedback to an optical cross-connect switch.

The electrical signals 1323A-1323N are coupled into the network management controller (NMC) 1320 of the  
15 attached network equipment 1302. In one embodiment, the electrical signals 1323A-1323N, or a representation thereof, are signaled back to the optical cross-connect switch 1300 over the out-of-band signaling channel on the network 1304. The electrical signals 1323A-1323N, or a  
20 representation thereof, are transmitted from the network management controller 1320 in the attached network equipment 1302 to the network management controller 1310 in the optical cross-connect switch 1300. In this manner, the attached network equipment 1302 signals to the optical  
25 cross-connect switch 1300. In a similar manner with differing information, the optical cross-connect switch 1300 can signal to the attached network equipment 1302 over the out-of-band signaling channel.

The optical-electrical-optical converters 1322A-1322N  
30 are expensive and as a result of being already available in the attached network equipment 1302, they are not needed in the optical cross-connect switch 1300 if the signaling interface of the present invention is provided.

This can provide considerable cost savings when purchasing optical cross-connect switches 1300.

- In Figure 13, the attached network equipment 1302 that is coupled to the optical cross-connect switch 1300
- 5 is a WDM line terminal 1302 which also includes a wave division multiplexer/demultiplexer 1324 along with the network management controller 1320 and the one or more port cards 1321A-1321N with the optical-electrical-optical converters 1322A-1322N. The wave division
- 10 multiplexer/demultiplexer 1324 couples to a pair of optical fibers on one end to carry wave division multiplexed signals 1326 in each direction for full duplex communication and one or more pairs of optical fibers on an opposite end to couple to the I/O port cards 1321A-
- 15 1321N. The wave division multiplexer/demultiplexer 1324 multiplexes multiple light signals received from respective optical fibers in one direction into a wave division multiplexed signal 1326 having multiple light signals of different wavelengths carried over one optical
- 20 fiber. The wave division multiplexer/demultiplexer 1324 demultiplexes a wave division multiplexed signal 1326 in an opposite direction having multiple light signals of different wavelengths carried over one optical fiber into multiple light signals for transmission to the optical
- 25 cross-connect switch 1300 over the data lines 1306A-1306N. The wave division multiplexed signal 1326 provides greater data bandwidth and channel capacity over an optical fiber.
- The network connection to the network 1304 for the out-of-band signaling channel is an Ethernet, an RS232 or
- 30 other similar connection connecting together the network management controllers (NMCs) (also previously referred to as a network control module (NCM)) of the optical cross-connect switch 1300 and the attached network equipment 1302. Because the out-of-band signaling channel is

provided over the network 1304, other network equipment or monitoring stations can receive information and transmit information or control signals over the out-of band signaling channel regarding the network, the network  
5 equipment and the optical network components connected to the network. Thus, management of the network can be facilitated regarding the optical cross-connect 1300, the attached network equipment 1302, and other network equipment using the out-of-band signaling channel. The  
10 out-of-band signaling channel over the network can be considered a centralized signaling interface.

Referring now to Figure 14 a block diagram of a decentralized signaling interface between an optical cross-connect switch 1400 and attached network equipment  
15 1402 is illustrated. The decentralized signaling interface is provided by one or more dedicated signal lines 1404A-1404N between the optical cross-connect switch 1400 and the attached network equipment 1402. The one or more dedicated signal lines 1404A-1404N can be formed by  
20 using low-cost multimode (MM) optical fibers or by using low cost electrical wire links.

The one or more dedicated signal lines 1404A-1404N replaces the out-of-band signaling channel of the network 1304. Whereas the out-of-band signaling channel of the  
25 network 1304 provided signals regarding switching each of the optical signals on multiple communication channels, one dedicated signal line 1404 provides information regarding switching of optical signals on one communication channel. Furthermore, the centralized  
30 signaling between the between the optical cross-connect switch 1400 and the attached network equipment 1402 was performed by the centralized NMCs 1310 and 1320 at a central control level. In contrast, decentralized signaling is performed by the I/O port cards (also

referred to as line cards or herein previously as I/O port modules) at a line-card level which is a much lower level than the centralized NMC level.

- In the embodiment illustrated in Figure 14, the
- 5 optical cross-connect switch 1400 includes the network management controller (NMC) 1310, one or more I/O port cards 1414A-1414N (also referred to as line cards, port cards and I/O port modules), and the optical switch fabric 1312. Each of the one or more I/O port cards 1414A-1414N
- 10 and 1415A-1415N of the optical cross-connect switch 1400 includes an optical input port and an optical output port. Each of the one or more port cards 1414A-1414N further may include optical-electrical converters (O/E) 1416A-1416N if the dedicated signal line is an optical fiber. The
- 15 optical-electrical converters 1416A-1416N of the optical cross-connect switch are much less expensive than optical-electrical-optical converters (O/E/O) that might otherwise be needed therein. Optical-electrical converters (O/E) are typically a fiber optic receiver module which includes
- 20 a photodetector.

- The attached network equipment 1402 includes one or more port cards 1421A-1421N (also referred to as line cards). Each of the one or more port cards 1321A-1321N includes an optical-electrical-optical converter 1322A-
- 25 1322N on its data input ports to couple to optical fibers of the data lines 1306A-1306N. In the case the dedicated signal lines 1404A-1404N are optical fibers, each of the one or more port cards 1321A-1321N further includes an electrical-optical converter (E/O) 1422A-1422N to convert
- 30 electrical signals 1423A-1423N into optical signals. Electrical-optical converters (E/O) are typically a fiber optic transmitter module which include a semiconductor laser with control electronics. Optical-electrical-

optical converters (O/E/O) are typically a combination of an O/E converter coupled together with an E/O converter.

The attached network equipment 1402 that is illustrated coupled to the optical cross-connect switch 1400 is a WDM line terminal 1402. A WDM line terminal 1402 also includes a wave division multiplexer 1324 along with the one or more port cards 1421A-1421N with the optical-electrical-optical converters 1322A-1322N.

The one or more optical-electrical-optical converters 1322A-1322N first convert the optical signals on the data lines 1306A-1306N into electrical signals and then convert the electrical signals into optical signals. The one or more optical-electrical-optical converters 1322A-1322N are tapped to provide information regarding the optical signals in electrical form on the electrical signals 1323A-1323N. The port cards 1421A-1421N of the attached network equipment 1402 detect other relevant information and communicate it directly to the respective port cards 1414A-1414N of the optical cross-connect switch 1400 over the dedicated signal lines 1404A-1404N rather than signaling between the central NMCs 1310 and 1320. Similarly, port cards 1414A-1414N of the optical cross-connect switch 1400 can detect relevant information and communicate it directly to the respective port cards 1421A-1421N of the attached network equipment 1402 over the dedicated signal lines 1404A-1404N.

Having established a signaling interface, it can be used for several purposes. The signaling interface can be used to enable fast network restoration through the optical cross-connect switch (OXC) in the event of network failures. Network failures include signal failures such as a loss of signal (LOS) or signal degradation such as through a bit error rate (BER) or other commonly know optical failure mechanisms. Attached network equipment

(ANE) can detect failures in real time by using its O/E/Os and convey this information to the optical cross-connect switch over the signaling interface so that it can perform network restoration. The optical cross-connect switch is typically without O/E/Os and may not be able to detect the failure due to the otherwise relatively simple monitoring usually found within an optical cross-connect switch.

Another use for the signaling interface is to allow attached network equipment (ANE) to control the optical cross-connect switch (OXC). For example, the attached network equipment (ANE) could signal to the OXC over the signaling interface in order for it to provide a particular switch configuration.

Another use for the signaling interface is so that the optical cross-connect switch can signal to the attached network equipment to set specific parameters therein. For example during setting up a connection, the optical cross-connect switch may ask the attached equipment to adjust its transmitter power level.

Another use for the signaling interface is to allow attached network equipment (ANE) to request a connection through the optical cross-connect switch (OXC). The optical cross-connect switch (OXC) sets up the connection and informs the attached network equipment (ANE) when its available.

Another use for the signaling interface is to perform protection switching between the OXC and the attached network equipment. For example, the signaling interface could be provided by one spare fiber facility for N working facilities between the attached equipment and the OXC. If one of these N facilities fails, the signaling channel is used by both devices to switch connections from the failed facility to the spare facility.

## VI. Connection Protection

- The present invention provides against connection or link failures between the interconnection of client
- 5 equipment and optical network equipment such as an optical cross-connect switch. The present invention decouples the connection protection that is provided between client equipment and the optical cross-connect switch from the optical network equipment protection and that which may be
- 10 provided by a network of optical cross-connects switches to handle failures of links and nodes inside the network. This is important because differing protection used inside the network from a connection protection used between the client and the OXC provides increased reliability.
- 15 Additionally, optical network protection provided between client equipment and optical cross-connect switches can use a more complex protection mechanism which uses bandwidth more efficiently.

- Providing connection protection is particularly
- 20 complex when the optical network equipment in question is an all-optical cross-connect switch. An all-optical cross-connect switch does not terminate the optical signals and convert them into electrical signals using optical-to-electrical converters on the input side.
- 25 Moreover, an all-optical cross-connect switch does not necessarily incorporate electrical-to-optical (E/O) converters (i.e. transmitters or lasers) that it can turn ON and OFF to provide signaling to the other end. As a result, it is difficult to implement conventional
- 30 protection schemes that rely on the presence of optical-to-electrical converters or electrical-to-optical converters inside the equipment to perform the protection. The present invention provides connection protection for

optical network equipment including optical cross-connect switches and all-optical cross-connect switches.

Referring now to Figure 15, client equipment (also referred to previously herein as attached network equipment) 1502 is coupled to an optical cross-connect switch (OXC) 1504 by means of the optical connections or working optical links 1506. Examples of client equipment 1502 include internet protocol (IP) routers, Synchronous Optical Network (SONET) terminals, add/drop multiplexers as well as additional optical cross-connect switches and other optical networking equipment. The protection provided by the present invention is facilitated by one or more extra full duplex connections between the client equipment 1502 and the optical cross-connect switch 1504 referred to herein as a protect connections, one of which is protect connection 1508. Also a signaling means for signaling purposes between the client equipment 1502 and the optical cross-connect switch 1504 is provided, such as the signaling channel 1514 which can be an out-of-band communication channel over the network 1304 which was previously discussed.

The optical links 1506 include N optical links 1506A-1506N and N optical links 1506A'-1506N'. The N optical links 1506A-1506N are for ordinarily transporting optical signals from the client 1502 to the optical cross-connect switch 1504 between ports 1521A-1521N and ports 1531A-1531N. The N optical links 1506A'-1506N' are for transporting optical signals from the optical cross-connect switch 1504 to the client 1502 between ports 1521A-1521N and ports 1531A-1531N. The optical links 1506A-1506N and 1506A'-1506N' are typically provided by fiber optic cables. The N optical links 1506A-1506N and N optical links 1506A'-1506N' can also be referred to as

working links. Working links ordinarily transport or propagate optical signals between the client 1502 and the optical cross-connect switch 1504 when there is no connection failure.

5           During a connection failure of a working link, a protect connection can provide bi-directional transport of optical signals such as the protect connection 1508 which includes an optical link 1518 and an optical link 1518'. The optical link 1518 is for communicating signals from  
10 the client 1502 to the optical cross-connect switch 1504 between port 1522 and port 1532. The optical link 1518' is for communicating signals from the optical cross-connect switch 1504 to the client 1502 between port 1522 and port 1532. The optical links 1518 and 1518' are  
15 typically provided by fiber optic cables. The optical link 1518 and the optical link 1518' can also be referred to as protection links. The protection links 1518 and 1518' atypically bi-directionally transport optical signals between the client 1502 and the optical cross-  
20 connect switch 1504. That is, the protection links typically bi-directionally transport optical signals between the client 1502 and the optical cross-connect switch 1504 only when there is a connection failure in one of the working links. While two optical links have been  
25 disclosed, only a single optical link need be used to provide bi-directional transport of optical signals between the client 1502 and the optical cross-connect switch 1504 in certain cases.

          The present invention provides M:N protection between  
30 the client equipment 1502 and the optical cross-connect switch 1504. That is for every N working I/O ports between the client 1502 and the optical cross-connect switch 1504 having N pairs of working links 1506 there-

between, there are M (where M is greater than or equal to one) additional I/O port(s) each being dedicated as a protect connection. The protect connection 1508 is an example of one protect connection with it being obvious  
5 that protect connection 1508 can be duplicated M times. In addition to the connectivity provided by the protect connection(s) and the additional ports, an automatic protection switching (APS) protocol is required to signal the failure, and transfer or switch the connection from  
10 the failed link to one of the M protect connections.

The client equipment 1502 includes a network management controller (NMC) 1520, N input/output (I/O) ports 1521A-1521N, and M (M being greater than or equal to one) extra I/O ports for every N I/O ports 1521A-1521N.  
15 I/O port 1522 is an example of one of the extra M I/O ports for every N I/O ports 1521A-1521N which is a spare protection port for the client equipment 1502. The N I/O ports 1521A-1521N couple to the N working links 1506 to communicate with the client 1502. The extra I/O port  
20 1522 couples to the protection links or protection connection 1508. The N I/O ports and the extra I/O port(s) of the client 1502 are typically provided by I/O port cards. The NMC 1520 couples to the signaling channel 1514. Various signaling means can be used including the  
25 signaling channel 1514 which is an out-of-band signaling channel, for example an Ethernet, or an in-band signaling channel as previously discussed.

The N I/O ports 1521A-1521N of the client are also referred to herein as working ports or client ports. The  
30 M extra I/O ports of the client are also referred to as a protection ports.

The optical cross-connect 1504 includes a network management controller (NMC) 1530, the optical switch

fabric 1312, N I/O ports 1531A-1531N, M extra I/O ports (I/O port 1532 being an example of one of the M extra I/O ports) for every N I/O ports 1531A-1531N, at least one additional I/O port 1541A-1541M for coupling to at least one network. The at least one additional I/O port 1541A-1541M for coupling to at least one network differs little from the N I/O ports 1531A-1531N but for the connection to the at least one network. In fact one of the N I/O ports 1531A-1531N can be utilized to couple to a network connection when not needed for connection to a client. The M extra I/O ports (I/O port 1532 being an example of one of the M extra I/O ports) for every N I/O ports 1531A-1531N acts as a protection port for the optical cross-connect switch 1504. The N I/O ports 1531A-1531N couple to the N working links 1506. The M extra I/O ports (I/O port 1532 being an example) couple to the protection links or protect connections (such as protect connection 1508). The N I/O ports 1531A-1531N, the M extra I/O ports, and the at least one additional I/O port 1541A-1541M of the optical cross-connect switch 1504 are typically provided by I/O port cards which may be referred to as working port cards, protection port cards, and network port cards respectively.

The N I/O ports 1531A-1531N of the optical cross-connect are also referred to as working ports or client ports because they couple to one or more clients. The at least one additional I/O port 1541A-1541M for coupling to at least one network respectively are also referred to as network port(s) because of their connectivity to a network. The M extra I/O ports (I/O port 1532 being an example of one of the M extra I/O ports) of the optical cross-connect are also referred to as protect ports.

In one embodiment, the NMC 1530 of the optical cross-connect switch 1504 and the NMC 1520 of the client 1502 couple to the signaling channel 1514 using signaling interfaces to transceive connection failure signals. In  
5 another embodiment, dedicated signaling lines (such as shown in Figure 14) may be used between the N I/O ports 1531A-1531N of the optical cross-connect switch 1594 and the N I/O ports 1521A-1521N of the client 1502 to transceive or bi-directionally transport connection  
10 failure signals. In yet another embodiment, the working link of the pair of working links without the connection failure coupled between the N I/O ports 1531A-1531N and the N I/O ports 1521A-1521N is used to transceive or bi-directionally transport connection failure signals.

15 Referring now to Figures 16A-16B and 17A-17B, the automatic protection switching (APS) protocol is now described for the possible connection failures. A connection failure can be caused by failure in one of the working links 1506 between the client 1502 and the optical  
20 cross-connect switch 1504. Alternatively, a connection failure can be caused by a failure in one of the N I/O ports 1521A-1521N in the client 1502 or one of the N I/O ports 1531A-1531N in the optical cross-connect switch 1504. For simplicity, either of the connection failure  
25 mechanisms will be referred to herein as a connection failure or link failure. A connection failure includes signal failure conditions such as a loss of signal (LOS) or signal degrade conditions such as through a bit error rate (BER) threshold crossings or other commonly know  
30 optical failure mechanisms.

Referring momentarily back to Figure 15, for the purposes of illustrating the protection connection 1508, assume that an exemplary communication channel is

established between the client 1502 and a network 1550. The optical switch fabric 1312 establishes a pair of optical paths 1551 and 1552 between its port 1531A and 1541B. Thus the optical cross-connect switch 1504 cross-  
5 connects signals between I/O port 1531A (also referred to as Port X) and I/O port 1541B (also referred to as Port Y) such that there is a full duplex connection between the client 1502 and the network 1550 over the pair of optical links 1506A and 1506A'. Assume also that the protection  
10 connection 1508 is provided between the ports 1522 and 1532 of the client 1502 and the optical cross-connect switch 1504 respectively.

Referring now to Figure 16A, a link failure occurs in one of the links 1506 in the optical connection from the  
15 client 1504 to the optical cross-connect switch 1504. In Figure 16A, the link 1506A is illustrated having the link failure 1602 in this case. This may be caused by damage to an optical fiber providing the optical connection or in a component in a port card of the client, such as a  
20 transmitter, or a port card of the optical cross-connect switch 1504. For whatever reason, assume that signals from the client 1504 are not cross-connected through the optical cross-connect switch to the network 1550 over the link 1506A.

25 Assuming link 1506A has the connection failure 1602, port 1531A in the receive side of the optical cross-connect 1504 detects the connection failure due to a lack of an incoming signal with or without using an optical-electrical-optical converter (O/E/O). Port 1531A can  
30 detect a signal loss without using an optical-electrical-optical converter (O/E/O) by tapping the optical signal and measuring the signal power or by determining if specific patterns are non-existent in the signal

indicating a signal loss. This detection of signal loss can generally be referred to as detecting or sensing a connection failure and may generally be referred to as being performed by a sensor in the N I/O ports 1531A-1531N or N I/O ports 1521A-1521N. Upon detecting a connection failure in one of the links 1506A-1506N, the optical cross-connect switch 1504 needs to signal the client 1502 as to which link has the connection failure.

Various signaling means can be used. A port, itself or through the NMC 1530, can signal from the optical cross-connect switch 1504 to the client equipment 1502 that a connection failure has occurred. The optical cross-connect switch 1504 can use the network 1514 illustrated in Figure 15 to signal to the client 1502 that a connection failure has occurred in one of the links 1506A-1506N. The network 1514 is referred to as an out-of-band signaling channel and is an Ethernet for example. In an alternate embodiment, the port itself can signal to the respective port of the client equipment that a connection failure has occurred in one of the links 1506A-1506N by terminating the signal propagation in the reverse direction over one of the links 1506A'-1605N'. The respective port in the client equipment detects the termination of the signal propagation as a connection failure in the respective one of the links 1506A'-1506N' and attempts to similarly signal the optical cross-connect switch and then switches to the protection connection 1508. Terminating the signal propagation over the reverse link of the respective link having the connection failure is referred to as an in-band signaling mechanism. Alternatively, a predetermined pattern, indicating signal loss on the link in the opposing direction, can be transmitted on the good link of the pair. Upon detecting the predetermined pattern, it is understood that a signal

failure has occurred on the opposite link. In another embodiment dedicated signaling links, electrical or optical such as the optical dedicated signaling links 1404A-1404N previously described, between port cards of  
5 the optical cross connect and port cards of the client 1502 can be used to signal a connection failure. In the exemplary case of the connection failure 1602, the port 1531A, itself or through the NMC 1530, signals from the optical cross-connect switch 1504 to the client equipment  
10 1502 that the connection failure 1602 has occurred in link 1506A as illustrated in Figure 16A.

Referring now to Figure 16B, the optical cross-connect switch 1504 and the client 1502 after being signaled, now know that a connection failure in link 1506A  
15 has occurred. The optical cross-connect switch 1504 and the client 1502 each switch from the pair of full duplex links 1506A and 1506A' over to the protection connection 1508 and its pair of full duplex links 1518 and 1518'. The client 1502 internally switches the connection from  
20 port 1521A to its protection port 1522. The optical cross-connect 1504 internally switches the connection from port 1531A to its protection port 1532 ending the optical paths 1551 and 1551' and establishing optical paths 1651 and 1651' respectively through the optical switch fabric  
25 1312 between its protection port 1532 and port 1541B.

Referring momentarily back to Figure 15, for the purposes of illustrating the protection connection 1508 for another connection failure, assume that the exemplary communication channel is established between the client  
30 1502 and a network 1550 as illustrated in Figure 15. That is, all links are working normally.

Referring now to Figure 17A, assume that a link failure occurs in one of the links 1506 in the optical

connection from the optical cross-connect switch 1504 to the client 1502. In Figure 17A, the link 1506A' is illustrated having the link failure 1702 in this case. This may be caused by damage to an optical fiber providing  
5 the optical connection or in a component in a port card of the optical cross-connect switch 1504 or the client 1502. Signals at the optical cross-connect switch 1504 that are supposed to be coupled to one of the links 1506A'-1506N' and to the client 1502 do not reach the client 1502 due to  
10 some connection failure.

Assuming link 1506A' has a connection failure, port 1521A in the receive side of the client 1502 detects the connection failure due to a lack of an incoming signal with or without using an optical-electrical-optical  
15 converter. Port 1521A can detect a signal loss with or without an optical-electrical-optical converter (O/E/O). Upon detecting a connection failure in one of the links 1506A'-1506N', the client 1502 needs to signal the optical cross-connect switch 1504 as to which link the connection  
20 failure has occurred on.

The various signaling means previously described can be used but in an alternate direction from the client 1502 to the optical cross-connect switch 1504. In the exemplary case of the connection failure 1702, the port  
25 1521A, itself or through the NMC 1520, signals from the client equipment 1502 to the optical cross-connect switch 1504 that the connection failure 1702 has occurred in link 1506A' as illustrated in Figure 17A. Using the out-of-band signaling channel, port 1521A signals to the NMC 1520  
30 the connection failure 1702 has occurred on link 1506A'. The NMC 1520 coupled to the network 1514, signals to the NMC 1530 coupled to the network 1514 using the out-of-band signaling channel. Using in-band signaling, the port

1521A signals over the good link 1506A to the port 1531A that the connection failure 1702 has occurred in link 1506A'. The signal over the good link 1506A can be either a pre-determined pattern indicating a signal loss on the  
5 opposite link or simply a termination of the signals on the link. If signal termination is used, the port 1531A detects the signal termination assuming that a connection failure has occurred and attempts to signal back to the client 1502 and switches to the protection port 1532.

10 Referring now to Figure 17B, the client 1502 and the optical cross-connect switch 1504 after being signaled, now know that a connection failure in link 1506A' has occurred. The optical cross-connect switch 1504 and the client 1502 each switch from the pair of full duplex links  
15 1506A and 1506A' over to the protection connection 1508 and its pair of full duplex links 1518 and 1518'. The client 1502 internally switches the connection from port 1521A to its protection port 1522. The optical cross-connect 1504 internally switches the connection from port  
20 1531A to its protection port 1532 ending the optical paths 1551 and 1551' and establishing optical paths 1651 and 1651' respectively through the optical switch fabric 1312 between its protection port 1532 and port 1541B.

Referring back to Figure 15, connection failures can  
25 occur in both respective pair of links between the ports of the client and the optical cross-connect switch. For example, link 1506A can experience the connection failure 1602 while the link 1506A' can experience the connection failure 1702 at the same moment. In this case, the client  
30 1502 detects the connection failure 1602, attempts to signal the optical cross-connect switch 1504 and switches over to the protect port 1522. The optical cross-connect switch 1504 also detects the connection failure 1702,

attempts to signal the client 1502, and internally switches the connection from port 1531A to its protection port 1532 ending the optical paths 1551 and 1551' and establishing optical paths 1651 and 1651' respectively  
5 through the optical switch fabric 1312 between its protection port 1532 and port 1541B. In this case because both links of the pair have a connection failure, and no signaling is required but attempts can be made to signal between the OXC and the client to accomplish the  
10 protection. The client 1502 and the optical cross-connect switch 1504 will assume in this case that a unidirectional cut has occurred in each of their respective links 1506A and 1506A'.

The present invention is thus described and has many  
15 advantages over the prior art. One advantage of the present invention is that service interruption is minimized in an optical connection between client equipment and optical cross-connect switches by utilizing the protection mechanism of the present invention.  
20 Another advantage of the present invention is that minimal change need be made to client equipment and an optical cross-connect switch in order to support the protection connection. Still another advantage of the present invention is that the network protection provided by the  
25 present invention is independent of other protection that may be provided in the network such as by the equipment itself or other network protection mechanisms.

While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to  
30 be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and

described, since various other modifications may occur to those ordinarily skilled in the art. For example, the optical cross-connect switch has been described and illustrated as coupling to one client and one network but  
5 can just as well couple to multiple clients and multiple networks and provide connection protection for optical connections between the multiple clients and optical network equipment. Furthermore, the connection protection can be provided for optical connections between other  
10 types of optical networking equipment and not just client equipment and optical cross-connect switches. Additionally, it is possible to implement the present invention or some of its features in hardware, firmware, software or a combination thereof where the software is  
15 provided in a processor readable storage medium such as a magnetic, optical, or semiconductor storage medium.

## CLAIMS

What is claimed is:

- 1           1. A connection protection mechanism for an optical  
2 cross-connect switch, the connection protection mechanism  
3 comprising:  
4           the optical cross-connect switch to couple to client  
5 equipment, the optical cross-connect switch to bi-  
6 directionally transport optical signals with the client  
7 equipment, the optical cross-connect switch including  
8           one or more working ports to couple to the  
9 client equipment, each of the one or more working  
10 ports to couple to the client equipment using a pair  
11 of working links, and  
12           a protection port to couple to the client  
13 equipment using a pair of protection links;  
14           and  
15           a signaling channel to transport a connection  
16 failure signal indicating if one working port of the one  
17 or more working ports has a connection failure in its  
18 working link or the one working port coupling to the  
19 client equipment.
- 1           2. The connection protection mechanism of claim 1  
2 wherein,  
3           if the one working port of the one or more working  
4 ports has the connection failure, the optical cross-  
5 connect switch to switch the coupling to the client

6 equipment from the one working port to the protection  
7 port.

1 3. The connection protection mechanism of claim 1  
2 wherein,

3 the optical cross-connect switch is without an  
4 optical-electrical-optical converter (O/E/O) but has a  
5 sensor to detect the connection failure.

1 4. The connection protection mechanism of claim 1  
2 wherein,

3 the client equipment includes one or more of the set  
4 of wavelength division multiplexed (WDM) line terminals,  
5 SONET add/drop multiplexers, internet protocol (IP)  
6 routers, additional optical cross-connect switches and  
7 Asynchronous Transfer Mode (ATM) switches.

1 5. The connection protection mechanism of claim 1  
2 wherein,

3 the optical cross-connect switch further includes  
4 at least one network port to couple to a  
5 network to bi-directionally transport optical  
6 signals with the network.

1 6. The connection protection mechanism of claim 5  
2 wherein,

3 the optical cross-connect switch further includes  
4 a first optical switch fabric of optical  
5 switches to connect at least one pair of optical

6 signals between the network equipment and the client  
7 equipment.

1 7. The connection protection mechanism of claim 1  
2 wherein,  
3 the optical cross-connect switch further includes a  
4 first optical switch fabric, and  
5 if the one working port of the one or more working  
6 ports has the connection failure, the first optical  
7 switch fabric to switch the coupling to the client  
8 equipment through the one working port to the protection  
9 port.

1 8. The connection protection mechanism of claim 1  
2 wherein,  
3 the signaling channel is an out-of-band signaling  
4 channel.

1 9. The connection protection mechanism of claim 8  
2 wherein,  
3 the out-of-band signaling channel is a communication  
4 channel over a network.

1 10. The connection protection mechanism of claim 9  
2 wherein,  
3 the optical cross-connect switch further includes  
4 a network management controller to couple to a  
5 network and the one or more working ports and the  
6 protection port, the network management controller

7 to transmit and to receive connection failure  
8 signals over the signaling channel regarding the  
9 working links between the optical cross-connect  
10 switch and the client equipment.

1 11. The connection protection mechanism of claim 9  
2 wherein,  
3 the network is a local area network, a metropolitan  
4 network, a wide area network, an internet, or an  
5 intranet.

1 12. The connection protection mechanism of claim 1  
2 wherein,  
3 the signaling channel is an in-band signaling  
4 channel.

1 13. The connection protection mechanism of claim 8  
2 wherein,  
3 the in-band signaling channel is the working link  
4 without the connection failure of the pair of working  
5 links having the connection failure.

1 14. The connection protection mechanism of claim 8  
2 wherein,  
3 the in-band signaling channel is a dedicated  
4 signaling link in parallel with each of the pair of  
5 working links.

1 15. The connection protection mechanism of claim 6  
2 wherein,  
3 the optical cross-connect switch further includes  
4 a second optical switch fabric of optical  
5 switches to provide a redundant optical switch  
6 fabric in case of a failure in the first optical  
7 switch fabric,  
8 and  
9 wherein if the one working port of the one or more  
10 working ports has the connection failure, the second  
11 optical switch fabric to switch the coupling to the  
12 client equipment through the one working port to the  
13 protection port.

1 16. The connection protection mechanism of claim 1  
2 wherein,  
3 the optical cross-connect switch further includes  
4 a second protection port to couple to the  
5 client equipment using a second pair of protection  
6 links  
7 and,  
8 wherein if the one working port of the one or more  
9 working ports has the connection failure, the optical  
10 cross-connect switch to switch the coupling to the client  
11 equipment from the one working port to the second  
12 protection port.

1 17. The connection protection mechanism of claim 6  
2 wherein,  
3 the optical switches of the optical switch fabric  
4 are micro-machined mirrors to direct optical signals  
5 between the client and the network.

1 18. A method for protecting connections between an  
2 optical cross-connect switch and a client, the method  
3 comprising:

4 detecting a connection failure on a working  
5 link of a pair of working links between the optical  
6 cross-connect switch and the client;  
7 signaling the optical cross-connect switch or  
8 the client of the connection failure in response to  
9 detecting the connection failure; and  
10 switching to a pair of protection links between  
11 the optical cross-connect switch and the client from the  
12 pair of working links having the connection failure.

1 19. The method of claim 18 wherein,  
2 the optical cross-connect switch is without an  
3 optical-electrical-optical converter (O/E/O) but has a  
4 sensor to detect the connection failure.

1 20. The method of claim 18 wherein,  
2 the client includes one or more of the set of  
3 wavelength division multiplexed (WDM) line terminals,  
4 SONET add/drop multiplexers, internet protocol (IP)

5 routers, additional optical cross-connect switches and  
6 Asynchronous Transfer Mode (ATM) switches.

1 21. The method of claim 18 further comprising:  
2 providing a signaling channel between the  
3 optical cross-connect switch and the client; and  
4 wherein the signaling includes  
5 transmitting a connection failure signal over  
6 the signaling channel to the optical cross-connect switch  
7 or the client in response to detecting the connection  
8 failure.

1 22. The method of claim 21 wherein,  
2 the signaling channel is an out-of-band signaling  
3 channel.

1 23. The method of claim 18 further comprising:  
2 cross-connecting optical signals between the client  
3 and a communication network using micro-machined mirrors.

1 24. The method of claim 18 wherein,  
2 the connection failure is detected by the optical  
3 cross-connect switch in the working link from the client  
4 to the optical cross-connect switch, and the optical  
5 cross-connect switch signals the connection failure to  
6 the client by  
7 disabling optical signal propagation from the  
8 optical cross-connect switch to the client over the

9 working link without the connection failure of the pair  
10 of working links with the connection failure.

1 25. The method of claim 18 wherein,  
2 the connection failure is detected by the optical  
3 cross-connect switch in the working link from the client  
4 to the optical cross-connect switch, and the optical  
5 cross-connect switch signals the connection failure to  
6 the client by  
7 transmitting an optical signal having a pattern over  
8 the working link from the optical cross-connect switch to  
9 the client without the connection failure, the pattern  
10 indicating the connection failure in the working link  
11 from the client to the optical cross-connect switch.

1 26. The method of claim 25 wherein,  
2 the signaling channel is an in-band signaling  
3 channel.

1 27. The method of claim 18 wherein,  
2 the connection failure is detected by the client in  
3 the working link from the optical cross-connect switch to  
4 the client, and the client signals the connection failure  
5 to the optical cross-connect switch by  
6 disabling optical signal propagation from the client  
7 to the optical cross-connect switch over the working link  
8 from the client to the optical cross-connect switch  
9 without the connection failure of the pair of working  
10 links with the connection failure.

1 28. The method of claim 18 wherein,  
2 the connection failure is detected by the client in  
3 the working link from the optical cross-connect switch to  
4 the client, and the client signals the connection failure  
5 to the optical cross-connect switch by

6 transmitting an optical signal having a pattern over  
7 the working link from the client to the optical cross-  
8 connect switch without the connection failure, the  
9 pattern indicating the connection failure in the working  
10 link from the optical cross-connect switch to the client.

1 29. A connection protection interface for an optical  
2 cross-connect switch, the connection protection interface  
3 comprising:

4 one or more I/O port cards in the optical cross-  
5 connect switch, each of the one or more I/O port cards to  
6 couple to a client equipment using working optical links;  
7 and

8 M protection port cards for every N I/O port cards  
9 of the one or more I/O port cards, the M protection port  
10 cards to couple to the client equipment using protection  
11 optical links.

1 30. The connection protection interface of claim 29  
2 wherein,

3 the protection port cards to bi-directionally  
4 transport optical signals with the client equipment over  
5 the protection optical links in the event of a connection

6 failure in a working link in one of the one or more I/O  
7 port cards.

1 31. The connection protection interface of claim 29  
2 wherein,  
3 each of the working optical links is a pair of  
4 optical fiber and each of the protection optical links is  
5 a pair of optical fibers.

1 32. The connection protection interface of claim 29  
2 wherein,  
3 each of the working optical links is a single  
4 optical fiber and each of the protection optical links is  
5 a single optical fiber.

1 33. The connection protection interface of claim 29  
2 wherein,  
3 M is greater than or equal to one and N is greater  
4 than or equal to one.

1 34. The connection protection interface of claim 29  
2 wherein,  
3 each of the one or more I/O port cards of the  
4 optical cross-connect switch is without an optical-  
5 electrical optical converter (O/E/O) but each has a  
6 sensor to detect the connection failure between the  
7 client equipment and the optical cross-connect switch.

1 35. The connection protection interface of claim 29  
2 wherein,

3 the client equipment includes one or more of the set  
4 of wavelength division multiplexed (WDM) line terminals,  
5 SONET add/drop multiplexers, internet protocol (IP)  
6 routers, additional optical cross-connect switches and  
7 Asynchronous Transfer Mode (ATM) switches.

1 36. The connection protection interface of claim 29  
2 wherein,

3 the one or more I/O port cards to communicate with  
4 the client equipment are client port cards.

1 37. The connection protection interface of claim 29  
2 wherein,

3 at least one I/O port card to communicate with a  
4 network and is a network port card.

1 38. The connection protection interface of claim 29  
2 wherein,

3 each of the one or more I/O port cards further has a  
4 dedicated signal line to couple to a respective I/O port  
5 card of the client equipment, the dedicated signal line  
6 to transmit and receive connection failure signals  
7 regarding the connection between the optical cross-  
8 connect switch and the client equipment.

1 39. The connection protection interface of claim 29  
2 further comprising:

3 an out of band signaling channel to transmit a  
4 connection failure signal in response to the sensor  
5 detecting a connection failure in a working link from the  
6 client equipment to the optical cross-connect switch.

1 40. The connection protection interface of claim 39  
2 wherein,

3 the connection failure signal indicates the  
4 connection failure and which of the one or more I/O  
5 port cards has the connection failure.

1 41. The connection protection interface of claim 29  
2 wherein,

3 the connection failure is detected by the optical  
4 cross-connect switch in a working link from the client  
5 equipment to the optical cross-connect switch, and the  
6 optical cross-connect switch signals the connection  
7 failure to the client equipment by

8 disabling optical signal propagation from the  
9 optical cross-connect switch to the client equipment over  
10 the working link without the connection failure of the  
11 one I/O port card of the one or more I/O port cards with  
12 the connection failure.

1 42. The connection protection interface of claim 29  
2 wherein,

3 the connection failure is detected by the optical  
4 cross-connect switch in a working link from the client  
5 equipment to the optical cross-connect switch, and the  
6 optical cross-connect switch signals the connection  
7 failure to the client equipment by

8 transmitting an optical signal having a pattern over  
9 the working link without the connection failure of the  
10 one I/O port card of the one or more I/O port cards with  
11 the connection failure, the optical signal having the  
12 pattern indicating the connection failure in the working  
13 link from the client to the optical cross-connect switch.

1 43. The connection protection interface of claim 42  
2 wherein,

3 the pattern of the optical signal indicates the  
4 connection failure and which of the one or more I/O port  
5 cards has the connection failure.

1 44. A protected connection between an optical cross-  
2 connect switch and a client equipment in a communication  
3 network system, the protected connection comprising:

4 one or more pairs of optical links coupled between  
5 the optical cross-connect switch and the client equipment  
6 as working links over which optical signals ordinarily  
7 propagate without a connection failure; and

8 at least one pair of optical links coupled between  
9 the optical cross-connect switch and the client equipment  
10 as protection links over which optical signals can

11 atypically propagate in the event of a connection  
12 failure.  
13

1 45. The protected connection of claim 44 wherein,  
2 the optical cross-connect switch includes,  
3 one or more input/output (I/O) ports coupled to  
4 the one or more pairs of optical links as the  
5 working links to connect and bi-directionally  
6 transport optical signals with the client equipment,  
7 and  
8 at least one protection port to couple to the  
9 at least one pair of optical links as the protection  
10 links to connect with the client equipment and  
11 atypically bi-directionally transport optical  
12 signals with the client equipment in the event of a  
13 connection failure in the working links of the one  
14 or more pairs of optical links;  
15 and  
16 the client equipment includes,  
17 one or more I/O ports coupled to the one or  
18 more pairs of optical links as the working links to  
19 connect and bi-directionally transport optical  
20 signals with the optical cross-connect switch, each  
21 of the one or more I/O ports having a sensor to  
22 detect a connection failure between the client  
23 equipment and the optical cross-connect switch, and  
24 at least one protection port to couple to the  
25 at least one pair of optical links as the protection

26 links to connect with the optical cross-connect  
27 switch and atypically bi-directionally transport  
28 optical signals with the optical cross-connect  
29 switch in the event of a connection failure in the  
30 working links of the one or more pairs of optical  
31 links.

1 46. The protected connection of claim 45 wherein,  
2 the one or more I/O ports of the optical cross-  
3 connect switch are without an optical-electrical-optical  
4 converter (O/E/O) but each has a sensor to detect a  
5 connection failure between the client equipment and the  
6 optical cross-connect switch.

1 47. The protected connection of claim 44 wherein,  
2 the client equipment includes one or more of the set  
3 of wavelength division multiplexed (WDM) line terminals,  
4 SONET add/drop multiplexers, internet protocol (IP)  
5 routers, additional optical cross-connect switches and  
6 Asynchronous Transfer Mode (ATM) switches.

1 48. The protected connection of claim 44 further  
2 comprising:  
3 an out-of-band signaling channel between the client  
4 equipment and the optical cross-connect switch, the out-  
5 of-band signaling channel to transmit a connection  
6 failure signal in response to detection of a connection  
7 failure in the working links between the client equipment  
8 and the optical cross-connect switch.

1 49. The protected connection of claim 48 wherein,  
2 the out-of-band signaling channel is a  
3 communication channel of a network.

1 50. The protected connection of claim 48 wherein,  
2 the connection failure signal indicates the  
3 connection failure and which of the one or more I/O  
4 ports of the client equipment and the optical cross-  
5 connect switch has the connection failure.

1 51. The protected connection of claim 44 further  
2 comprising:

3 one or more in-band signaling channels between the  
4 client equipment and the optical cross-connect switch,  
5 the one or more in-band signaling channels to transmit a  
6 connection failure signal in response to detection of a  
7 connection failure in the working links between the  
8 client equipment and the optical cross-connect switch.

1 52. The protected connection of claim 51 wherein,  
2 the connection failure signal indicates the  
3 connection failure and which of the one or more I/O  
4 ports of the client equipment and the optical cross-  
5 connect switch has the connection failure.

1 53. The protected connection of claim 51 wherein,  
2 the one or more in-band signaling channels between  
3 the client equipment and the optical cross-connect switch

4 are one or more dedicated signal lines coupled between  
5 the respective one or more I/O ports of the client  
6 equipment and the optical cross-connect switch, the one  
7 or more dedicated signal lines to transmit and receive  
8 connection failure signals regarding the connection  
9 between the optical cross-connect switch and the client  
10 equipment.

1 54. The protected connection of claim 51 wherein,  
2 the one or more in-band signaling channels between  
3 the client equipment and the optical cross-connect switch  
4 are  
5 the optical links without the connection failure of  
6 the one or more pairs of optical links of the working  
7 links having the connection failure, the optical links  
8 without the connection failure to propagate connection  
9 failure signals regarding the connection between the  
10 optical cross-connect switch and the client equipment.

1 55. The protected connection of claim 51 wherein,  
2 the connection failure is detected by an I/O port of  
3 the optical cross-connect switch in an optical link of a  
4 pair of optical links and the optical cross-connect  
5 switch signals the connection failure to the client  
6 equipment by  
7 disabling optical signal transport from the optical  
8 cross-connect switch to the client equipment over another  
9 optical link without the connection failure of the pair  
10 of optical links.

1 56. The protected connection of claim 51 wherein,  
2 the connection failure is detected by an I/O port of  
3 the optical cross-connect switch in an optical link of a  
4 pair of optical links and the optical cross-connect  
5 switch signals the connection failure to the client  
6 equipment by  
7 transmitting an optical signal having a pattern over  
8 another optical link without the connection failure of  
9 the pair of optical links, the optical signal having the  
10 pattern indicating the connection failure in the optical  
11 link.

1 57. The protected connection of claim 51 wherein,  
2 the connection failure is detected by an I/O port of  
3 the client equipment in an optical link of a pair of  
4 optical links and the client equipment signals the  
5 connection failure to the optical cross-connect switch by  
6 disabling optical signal transport from the client  
7 equipment to the optical cross-connect switch over  
8 another optical link without the connection failure of  
9 the pair of optical links.

1 58. The protected connection of claim 51 wherein,  
2 the connection failure is detected by an I/O port of  
3 the client equipment in an optical link of a pair of  
4 optical links and the client equipment signals the  
5 connection failure to the optical cross-connect switch by

6 transmitting an optical signal having a pattern over  
7 another optical link without the connection failure of  
8 the pair of optical links, the optical signal having the  
9 pattern indicating the connection failure in the optical  
10 link.

1 59. A connection protection mechanism for optical  
2 network equipment, the connection protection mechanism  
3 comprising:  
4 the optical network equipment to couple to client  
5 equipment, the optical network equipment to bi-  
6 directionally transport optical signals with the client  
7 equipment, the optical network equipment including  
8 one or more working ports to couple to the  
9 client equipment, each of the one or more working  
10 ports to couple to the client equipment using a pair  
11 of working links, and  
12 a protection port to couple to the client  
13 equipment using a pair of protection links;  
14 and  
15 a signaling channel to transmit and receive a  
16 connection failure signal indicating if one working port  
17 of the one or more working ports has a connection failure  
18 in a working link or a working port coupling to the  
19 client equipment.

1 60. The connection protection mechanism of claim 59  
2 wherein,



3           if the one working port of the one or more working  
4       ports has the connection failure, the optical network  
5       equipment to switch the coupling to the client equipment  
6       from the one working port to the protection port.

1


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206

## ABSTRACT

The present invention provides methods, apparatus and systems for protecting connections between optical cross-connect switches and client equipment. A connection  
5 failure is detected, signaled, and a switch made by the client equipment and the optical cross-connect switch to a protection connection between them so as to minimize service interruption. An out-of-band channel or an in-band channel can be used to signal the connection failure.

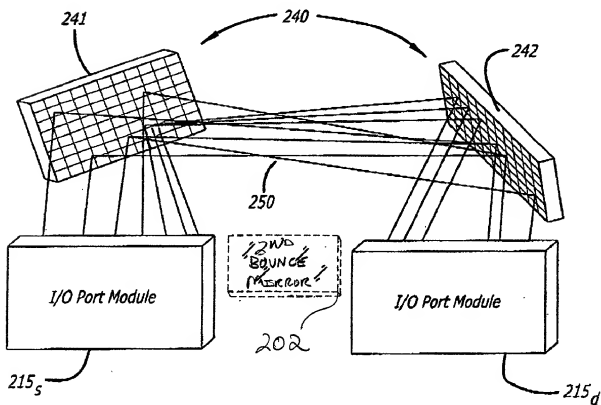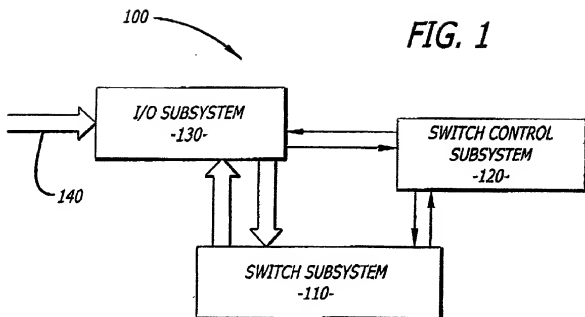

**FIG. 2**

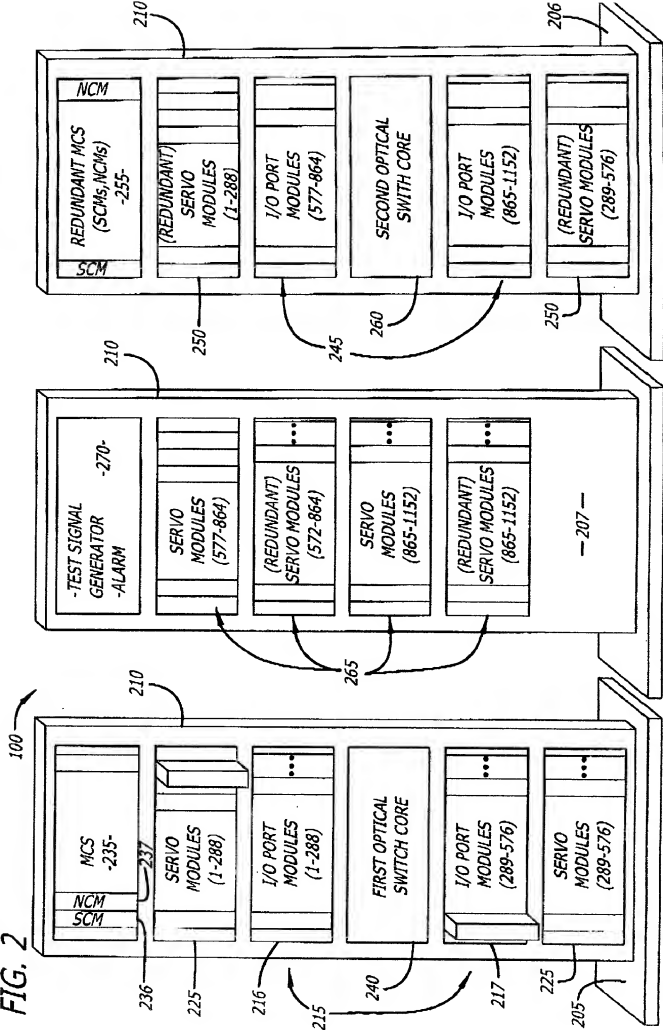

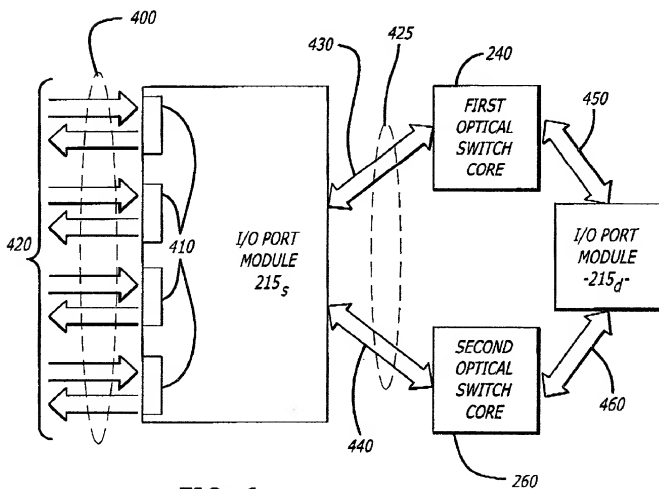
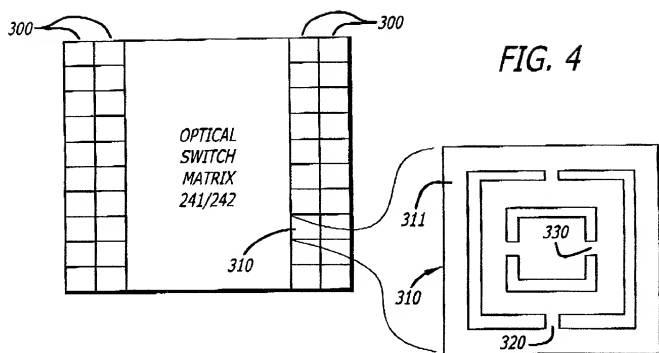


FIG. 6

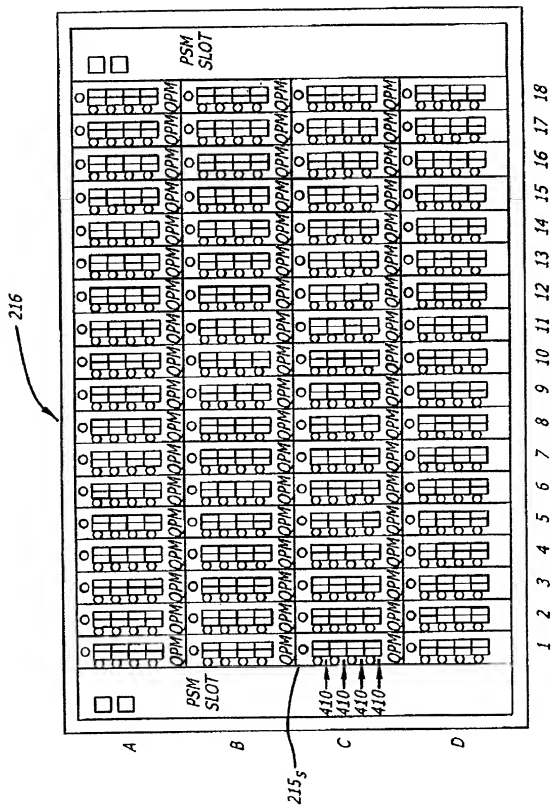


FIG. 5

FIG. 7

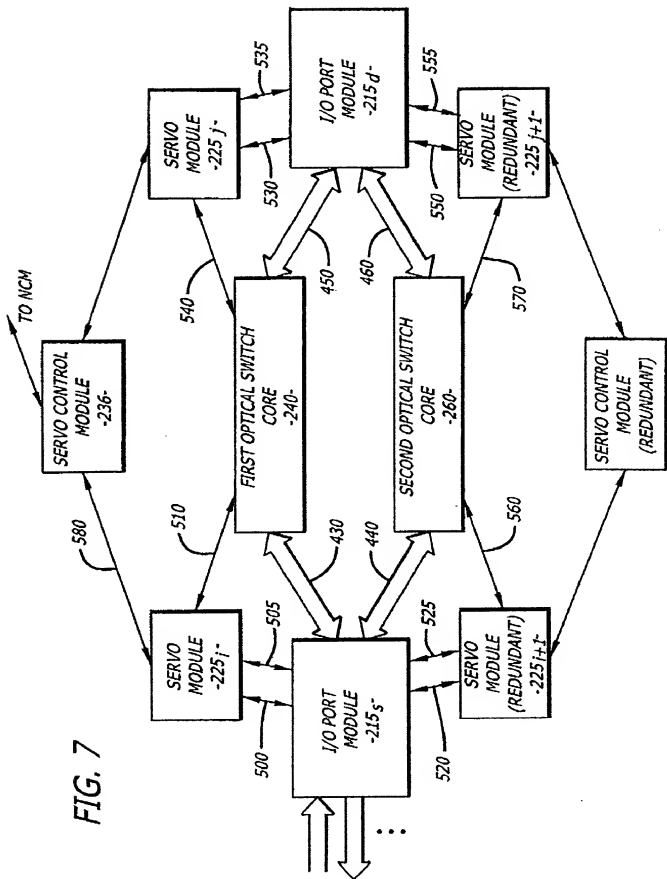


FIG. 8

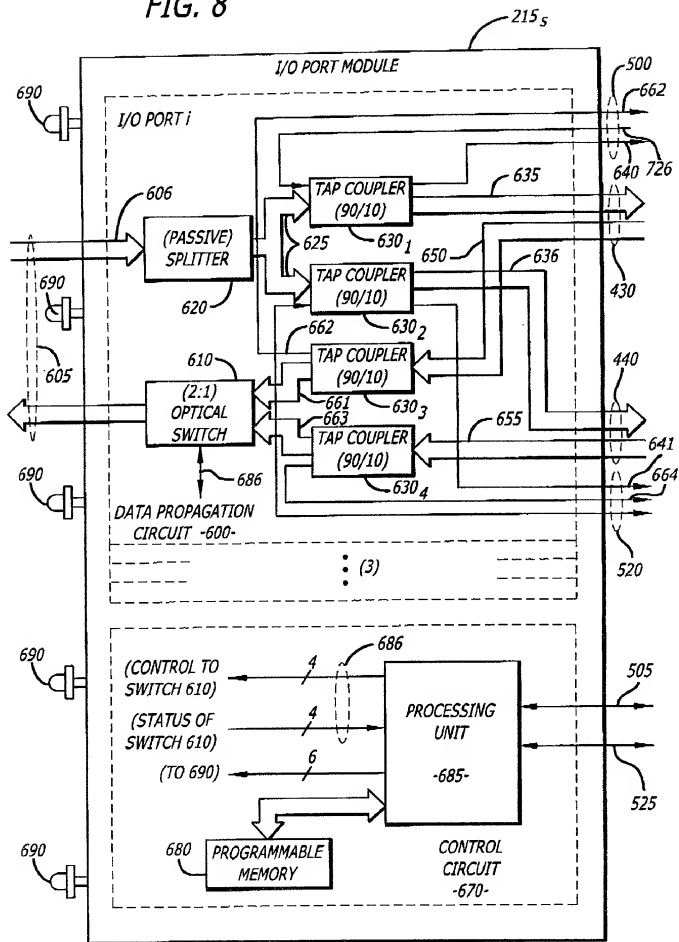
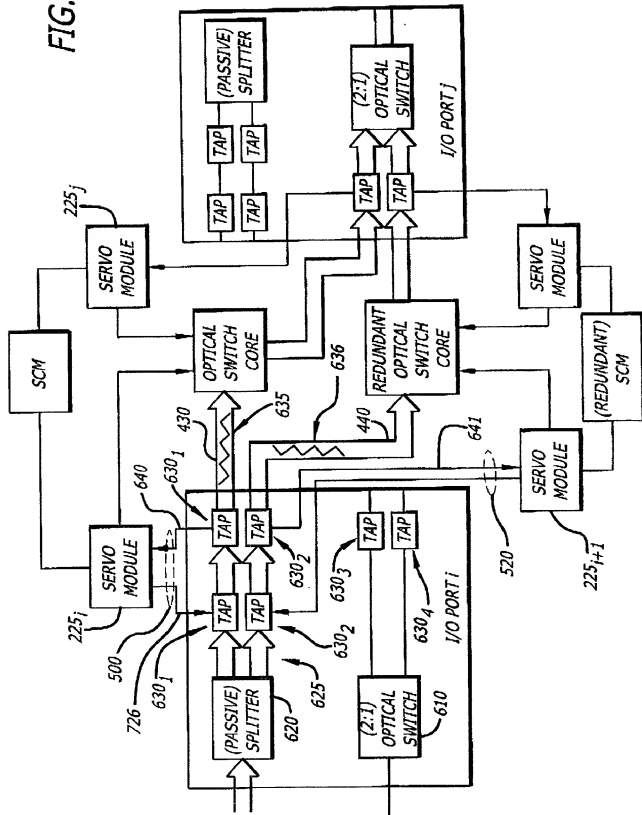


FIG. 9



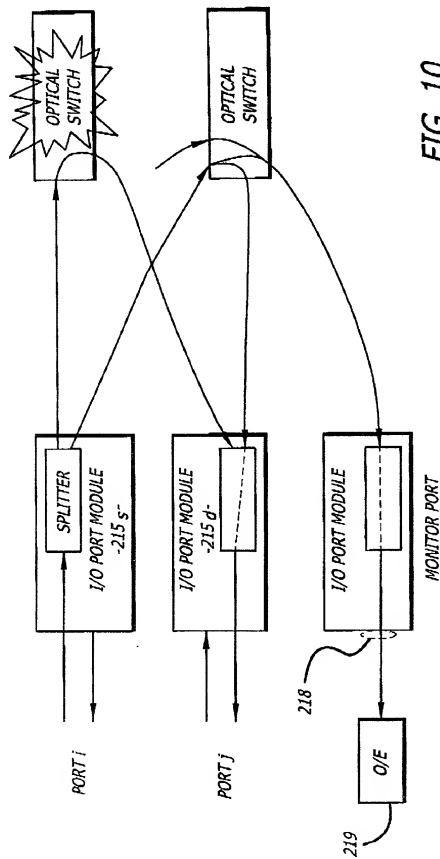


FIG. 10

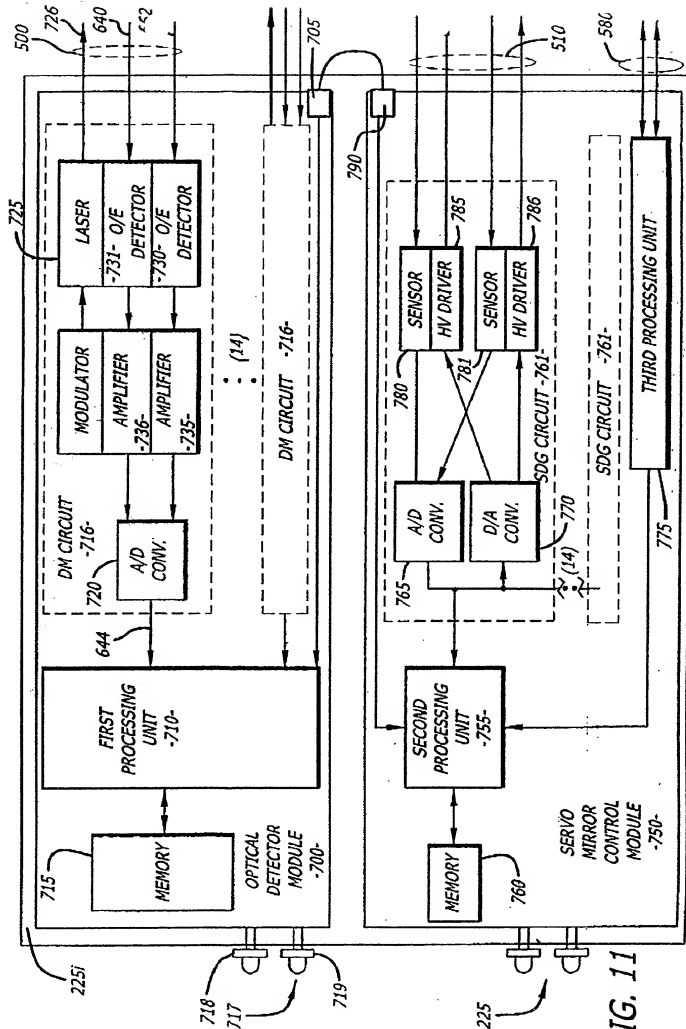
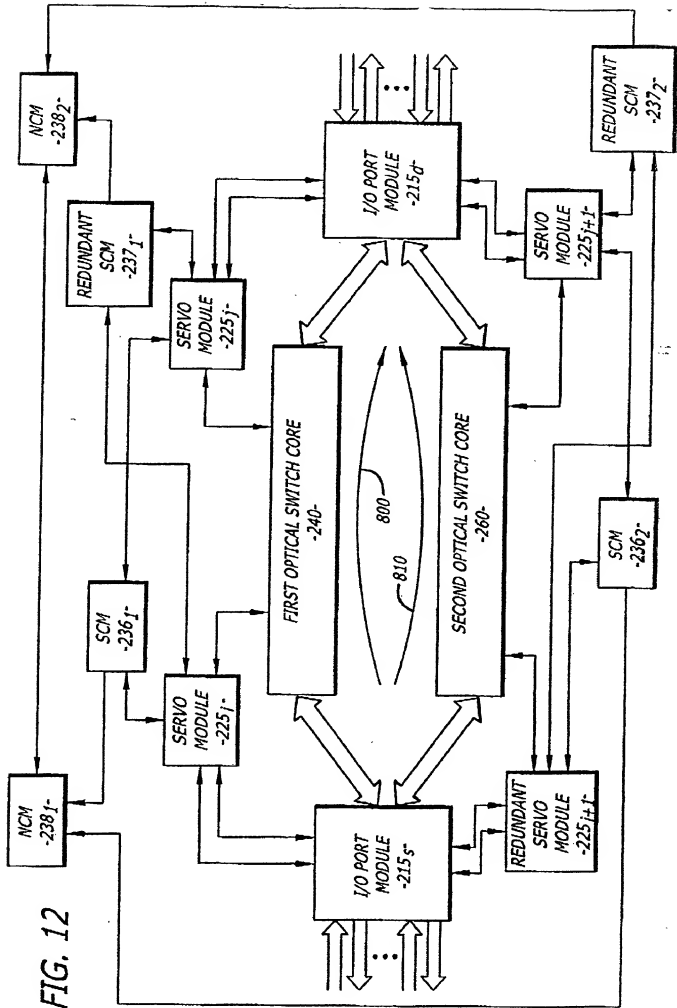


FIG. 11



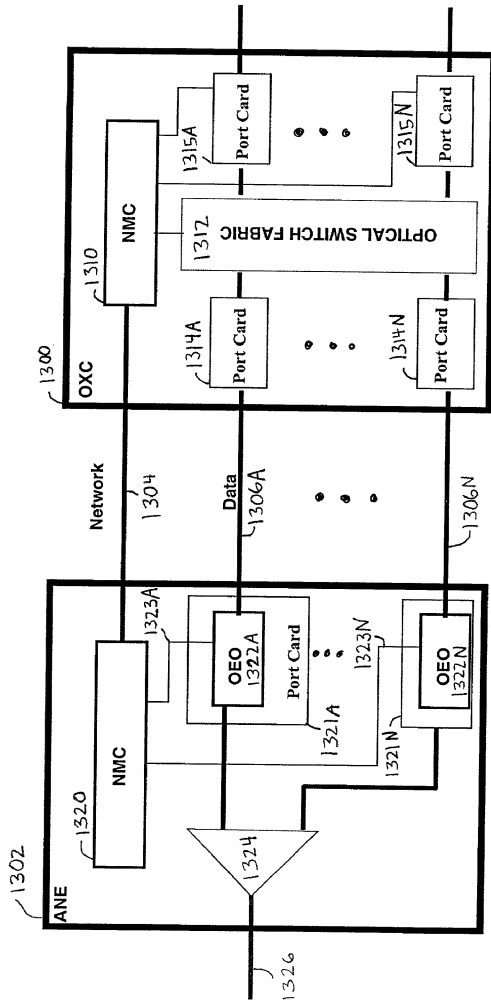


FIG. 13

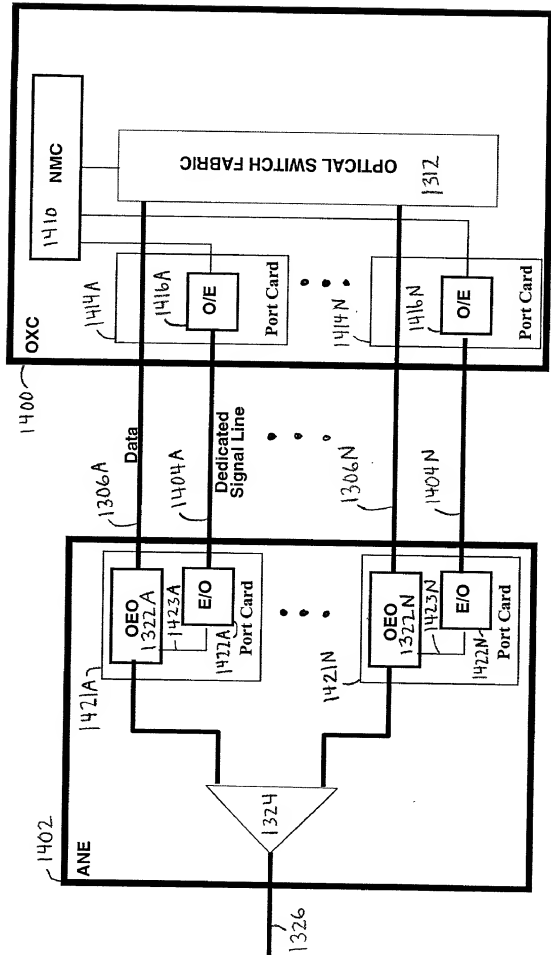


FIG. 14



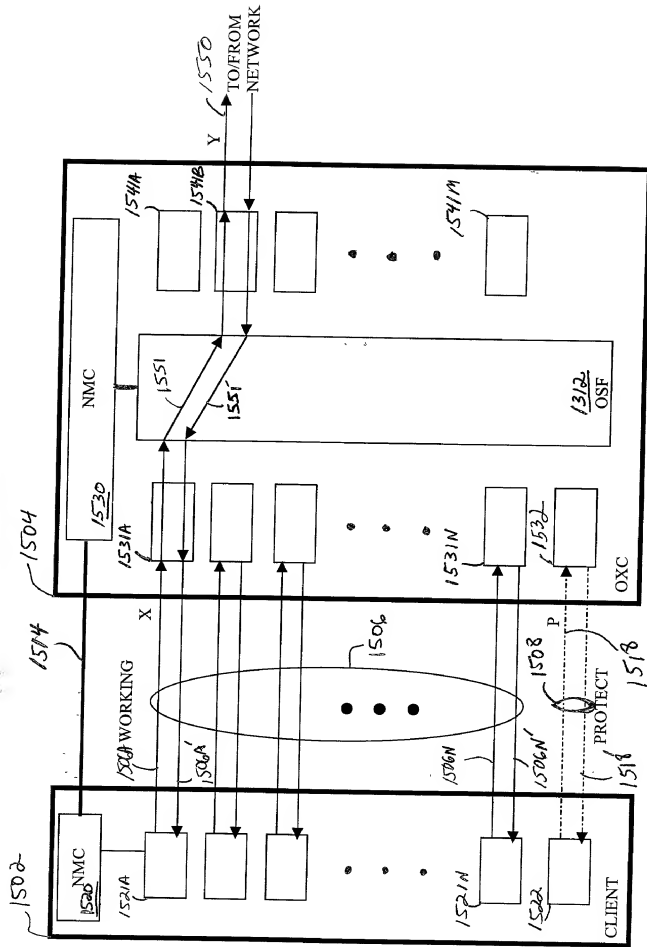



FIG. 15

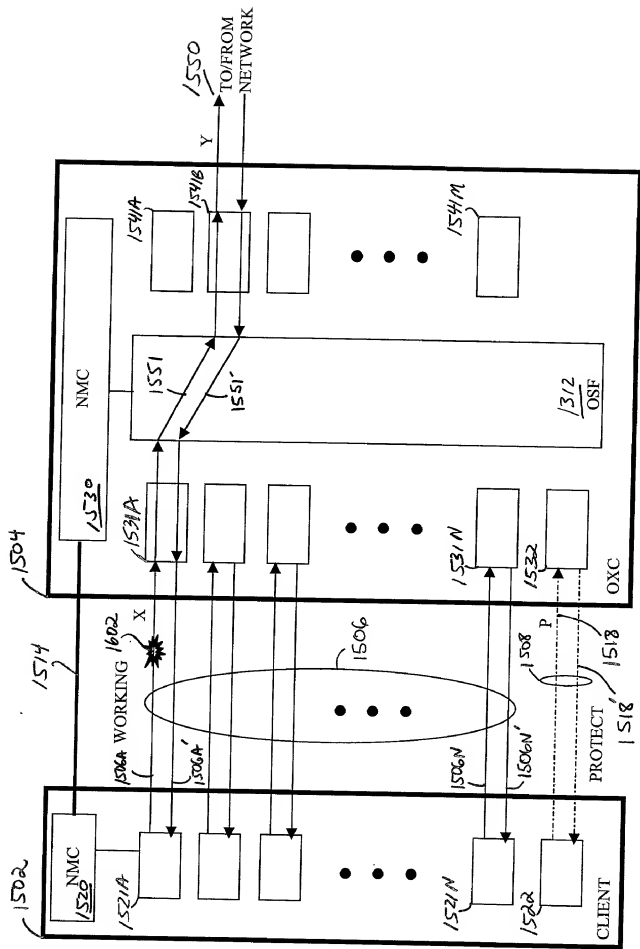


**FIG. 16A**

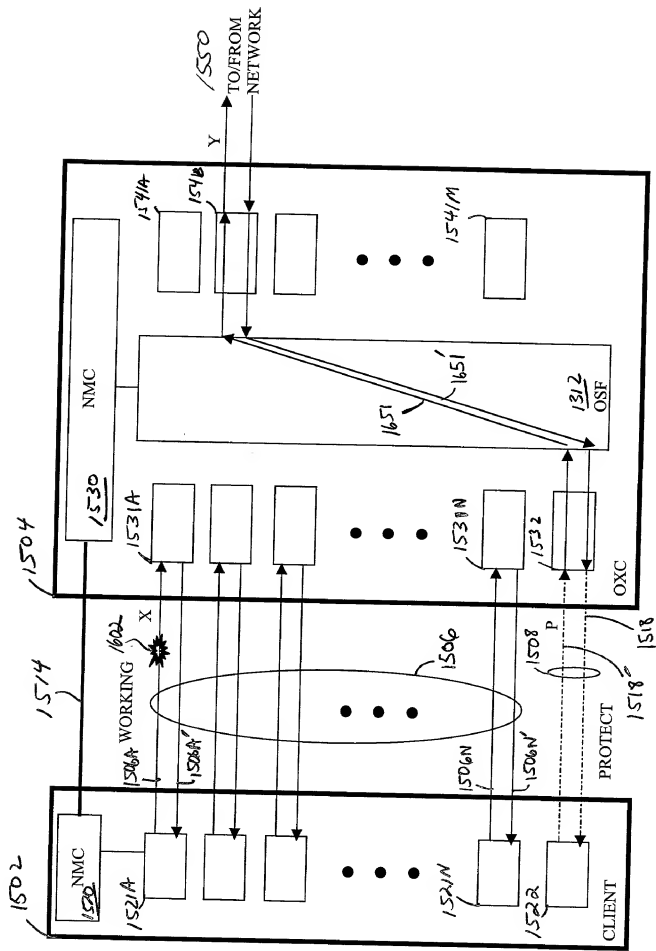

**FIG. 16B**

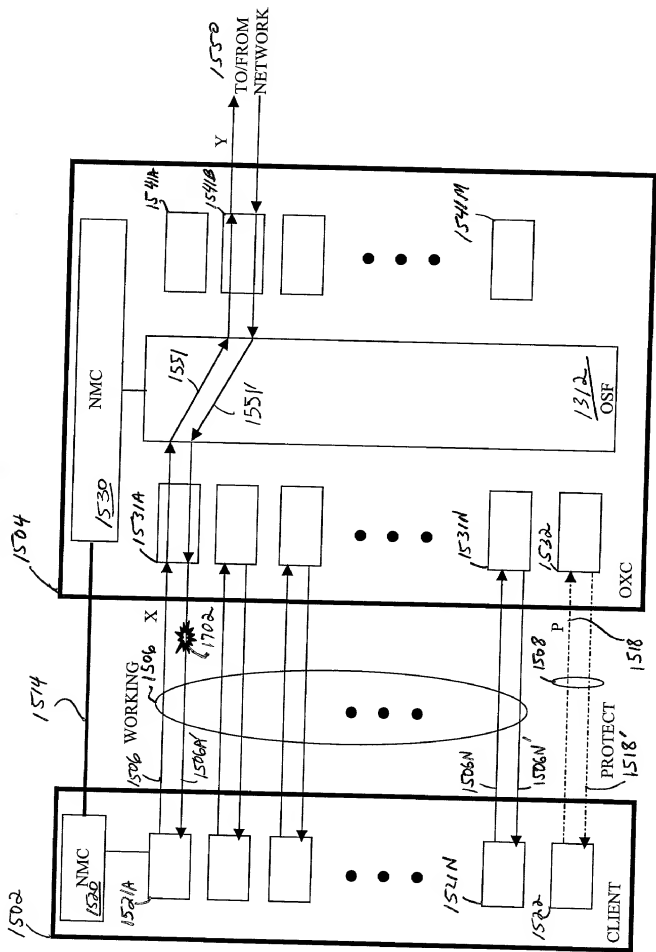

**FIG. 17A**

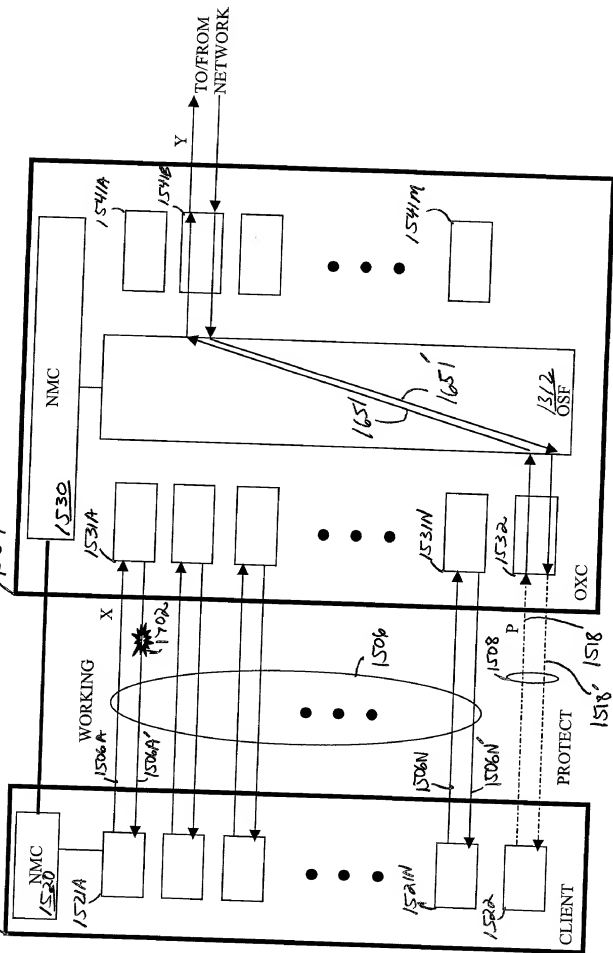

**FIG. 17B**

## DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or any original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### CONNECTION PROTECTION BETWEEN CLIENTS AND OPTICAL CROSS-CONNECT SWITCHES

the specification of which ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as \_\_\_\_\_  
United States Application Number \_\_\_\_\_  
or PCT International Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

#### Prior Foreign Application(s):

APPLICATION NUMBER	COUNTRY (OR INDICATE IF PCT)	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

APPLICATION NUMBER	FILING DATE
60/162,936	11/02/1999
60/170,094	12/10/1999
60/170,095	12/10/1999
60/170,093	12/10/1999
60/170,092	12/10/1999
60/186,108	03/01/2000
60/200,425	04/28/2000

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	FILING DATE	STATUS (ISSUED, PENDING, ABANDONED)

I hereby appoint the persons listed on Appendix A hereto (which is incorporated by reference and a part of this document) as my respective patent attorneys and patent agents, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to:

William E. Alford, Reg. No. 37,764, BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, LLP

(Name of Attorney or Agent)

12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025 and direct telephone calls to:

William E. Alford, (714) 557-3800.

(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**Full Name of Sole/First Inventor** (given name, family name) Kent Erickson

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Mountain View, California USA Citizenship USA  
(City, State) (Country)

P. O. Address 668 Willogate Street, Apt. #E  
Mountain View, California 94043 USA

Full Name of Second/Joint Inventor (given name, family name)

Subhashini Kaligotla

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Mountain View, California USA

Citizenship

India

*(City, State)*

*(Country)*

P. O. Address 2025 California Street, Apt. 38

Mountain View, California 94040 USA

Full Name of Third/Joint Inventor (given name, family name)

Rajiv Ramaswami

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Sunnyvale, California USA

Citizenship

India

*(City, State)*

*(Country)*


P. O. Address 758 Carlisle Way

Sunnyvale, California 94087 USA

## Appendix A

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, a firm including: William E. Alford, Reg. No. 37,764; Farzad E. Amini, Reg. No. 42,261; William Thomas Babbitt, Reg. No. 39,591; Carol F. Barry, Reg. No. 41,600; Jordan Michael Becker, Reg. No. 39,602; Lisa N. Benado, Reg. No. 39,995; Bradley J. Bereznek, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; R. Alan Burnett, Reg. No. 46,149; Gregory D. Caldwell, Reg. No. 39,926; Andrew C. Chen, Reg. No. 43,544; Thomas M. Coester, Reg. No. 39,637; Donna Jo Coningsby, Reg. No. 41,684; Dennis M. deGuzman, Reg. No. 41,702; Stephen M. De Klerk, Reg. No. P46,503; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Sanjeet Dutta, Reg. No. P46,145; Matthew C. Fagan, Reg. No. 37,542; Tarek N. Fahmi, Reg. No. 41,402; George Fountain, Reg. No. 36,374; Paramita Ghosh, Reg. No. 42,806; James Y. Go, Reg. No. 40,621; James A. Henry, Reg. No. 41,064; Willmore F. Holbrow III, Reg. No. P41,845; Sheryl Sue Holloway, Reg. No. 37,850; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; William W. Kidd, Reg. No. 31,772; Sang Hui Kim, Reg. No. 40,450; Walter T. Kim, Reg. No. 42,731; Eric T. King, Reg. No. 44,188; Erica W. Kuo, Reg. No. 42,775; George B. Leavell, Reg. No. 45,436; Gordon R. Lindeen III, Reg. No. 33,192; Jan Carol Little, Reg. No. 41,181; Kurt P. Leyendecker, Reg. No. 42,799; Joseph Lutz, Reg. No. 43,765; Michael J. Mallie, Reg. No. 36,591; Andre L. Marais, under 37 C.F.R. § 10.9(b); Paul A. Mendonsa, Reg. No. 42,879; Clive D. Menezes, Reg. No. 45,493; Chun M. Ng, Reg. No. 36,878; Thien T. Nguyen, Reg. No. 43,835; Thinh V. Nguyen, Reg. No. 42,034; Dennis A. Nicholls, Reg. No. 42,036; Daniel E. Ovanezian, Reg. No. 41,236; Kenneth B. Paley, Reg. No. 38,989; Marina Portnova, Reg. No. P45,750; William F. Ryann, Reg. 44,313; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Jeffrey Sam Smith, Reg. No. 39,377; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. 42,179; Edwin H. Taylor, Reg. No. 25,129; John F. Travis, Reg. No. 43,203; Joseph A. Twarowski, Reg. No. 42,191; Thomas A. Van Zandt, Reg. No. 43,219; Lester J. Vincent, Reg. No. 31,460; Glenn E. Von Terssch, Reg. No. 41,364; John Patrick Ward, Reg. No. 40,216; Mark L. Watson, Reg. No. P46,322; Thomas C. Webster, Reg. No. P46,154; and Norman Zafman, Reg. No. 26,250; my patent attorneys, and Firasat Ali, Reg. No. 45,715; and Justin M. Dillon, Reg. No. 42,486; Raul Martinez, Reg. No. 46,904; my patent agents, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (714) 557-3800, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division



SCANNED, # \_\_\_\_\_

Application deficiencies were found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

Pages out of sequence